highlights autumn 2016



ILO Modular LED

Low glare linear light-line system

ILO Family, the continuous light-line system, expands with a new optical system, based on modules of small symmetrical reflectors that are placed in the linear housing, creating a louvre effect. Thanks to low glare and a hidden light source within a reflector, the product provides high visual comfort. The new optical system will be applied in recessed, ceiling, pendant and pendant D/I versions of ILO family.



Besides microprismatic and opal optic, small symmetrical reflectors are now placed also in the recessed ALVA housing, providing even higher visual comfort thanks to hidden light source. Available in sizes: 300X600, 600X600, 620X620, 1200X300.

new

NURIEL LED

Soft light distribution and glare-free light for general and task area lighting.

With NURIEL LED you will see the light, but not the light-source, which will create a uniform distribution of light with no shadows and dark spots.





A perfect balance between decorative and functional lighting fixture
that enhances the mood and modern feel of every lighting area of an office
building, hotel foyer, conference room, entrance and corridor. With EOS System
you can connect together two models of EOS luminaire (rectangular, curved) and
create different lighting compositions and customized options:

U-shape, circle, curves.





- direct/indirect LED luminaire
- transparent panel
- 2700 5000 K



- CRI > 80 / 90 (on request)
- high-quality aluminium housing with powder coated
- black or white fine texture

CIRCULAR

From transparency to homogeneous light.

Characterized with a 24mm slim aluminium ring around a completely transparent panel, EOS Circular is an elegant and unobtrusive element in the room, which apparently changes its form when switched on, losing its transparency and transforming it in a homogeneously distributed light. It results in a perception of pleasant circular light hanging in the air.





- direct/indirect LED luminaire
- 10 different dimensions: 470, 560, 650, 740, 825, 1000, 1200, 1500, 1800, 2000 mm



- 3500 10000 lm
- 39 140 W
- 2700 / 3000/ 4000 / 5000 K
- RA > 80 / 90 (on request)
- High-quality aluminium housing with powder coated black or white fine texture. Colored detail in the housing available in white, black, green and red option, or plain.



Minimalism. Style. High visual comfort

The luminaire that makes your office a place of comfort and gives a stylish touch to your interior. Emitting light both up to the ceiling and down to the workspace, it supplies homogenous glare-free light and maximum visual comfort. It is a perfect fixture for conference rooms, open offices, lobbies, and other applications where you want to make an impact.







- * * 10[%]*
- high-quality aluminium housing with black or white powder coated finish
- options: EOS Sky (transparent panel) and EOS Cloud (PMMA Prismatic sheet)
- dimmable DALI
- available size 1200x300 mm
- RA > 80 / 90 (on request)
- 2700 / 3000 / 4000 K





Plain LED











- direct/indirect LED luminaire
- slim, suspended luminaire with elevated light opening
- high-quality aluminium housing with structure lacquered matt white
- combination of different modules to continuous light-lines system
- available sizes 1300 mm and 1600 mm
- RA > 80 / 90 (on request)
- flicker-free dimming (20-100%) / 2-channels /
 CASAMBI (on request)
- 2700 / 3000 / 4000 K or TW 2700-5000 K
- option of stand-alone sensor Active+













ILO LED FAMILY

Continuous light-line system

With its modular design, ILO LED can be used as an individual fixture or as a combination of modules put together in continuous lighting systems. With its straight lines it can be whether an elegant solution for representative offices as well as an energy-efficient solution for shops, retail areas, corridors and other applications. Thanks to Tunable White option, it has a positive affect to human biorhythm, health, effectiveness and concentration at work.

- combination of modules in continuous lines, corner or other special positions
- black, white or gray painted high-quality aluminium
- dimmable DALI
- 2000-3000 lm/m
- 21-35 W/m
- RA > 80 / 90 (on request)
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
















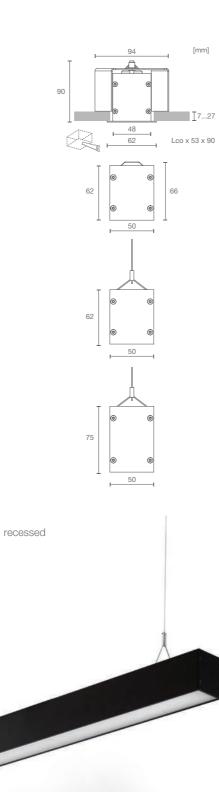



ILO Modular LED with new optical system







ALVA LED

Premium lighting environment for sustainable offices

ALVA LED represents a SMART combination of design and technology achieving the best possible light quality even when illuminating the most demanding lighting areas. Its slim design makes it an ideal solution for tight ceiling conditions and a perfect option to expose the place's architecture.

- fine prismatic PMMA optic for perfect glare reduction and no "rainbow effect"
- high efficiency
- UGR < 16
- flicker-free dimming (20-100 %)
- RA > 80 / 90 (on request)
- 2700 / 3000 / 4000 K
- available sizes: 300x600, 600x600, 620x620, 1200x300 mm












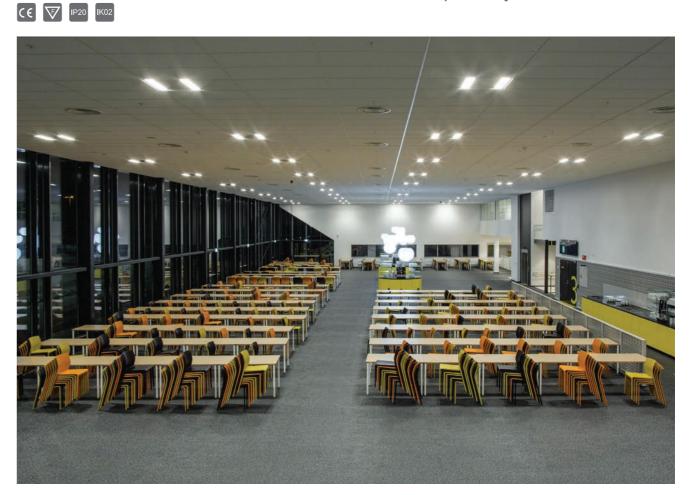



ARUN LED

Light that supports performance and well-being

ARUN LED recessed luminaire produces biologically effective light. Thanks to Tunable White option, not only has a positive affect to human biorhythm, health and sleeping quality, but also significantly influences the effectiveness and concentration at work.

- microprismatic optic and opal PMMA diffuser provide optimal, uniform and glare-free light with no visible LED hot spots and excellent light transmission
- flicker-free dimming (20-100 %)
- RA > 80 / 90 (on request)
- available sizes: 600x600, 620x620, 1200x300 mm
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- emergency 1 or 3 hours






















ARUN BASIC LED

Price-performance office solution

- microprismatic optic and opal PMMA diffuser provide optimal, uniform and glare-free light with no visible LED hot spots and excellent light transmission
- flicker-free dimming (20-100 %)
- RA > 80 / 90 (on request)
- UGR < 19
- available sizes: 600x600 mm
- 2700 / 3000 / 4000 / 5000 K























NOOR LED

Premium lighting environment for sustainable offices

NOOR LED downlight luminaire stands out with its clear design and outstanding performances. Being available in two sizes and with an affordable price, it is a perfect choice for many ambiences, especially for shops, corridors, offices, hotels, restaurants, libraries, residential interiors and as a general lighting. With its low profile housing fits perfectly to shallow mounting depths in suspended ceilings.

- high quality die-cast aluminium recessed housing, powder coated matt white RAL 9010
- dimmable DALI on request
- IP 44 on request
- RA > 80 / 90 (on request)
- 3000 / 4000 K














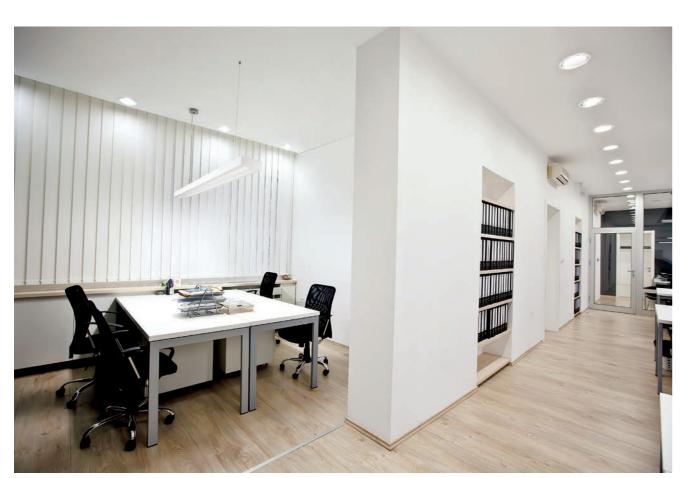



HYPERION ALU LED

Professional high-bay luminaire, best choice for industry and sport

HYPERION ALU LED is a price-performance high-bay luminaire suitable for suspended or ceiling installation. It offers sustainable, high-efficient lighting for industrial plants, warehouses and sport areas.

- high efficiency: 149lm/W
- light output 10600-44000 lm
- material: extruded aluminium profile powder coated matt white RAL 9003
- available in different lumen outputs
- through-wiring (on request)
- power connection on side or on top (on request)
- temperature range from -25 to 50°C

























HATOR LED

Low bay, durable and highly efficient moisture-proof luminaire

HATOR LED represents a high-quality, excellent energy efficient and maintenance free moisture-proof luminaire. Its robust housing makes it the best choice for many applications, such as: multi-story car parks, industrial plants, warehouses, storage and cold storage rooms, loading bays, corridors, agricultural buildings and other facilities with complex ambient conditions.

- temperature range from -25 to 35°C
- RA > 80 / 90 (on request)
- 3000 / 4000 / 5000 K
- gasket: non-aging expanded polyurethane





























www.ledluks.com

LED Luks d.o.o.

Mednarodni prehod 6, Vrtojba
SI-5290 Šempeter pri Gorici
Slovenia (EU)
info@ledluks.com

