





KELVIN	CRI	REAL OUTPUT	ENERGY CLASS
2700	90	~ 95	F
3000	90	~ 95	F
4000	80	~ 120	E

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-2  
-- EN 62471 -- EN 62031



## Syro 1 W

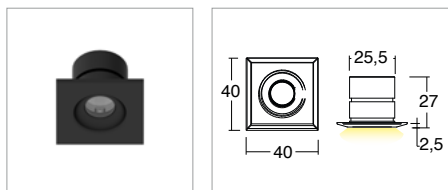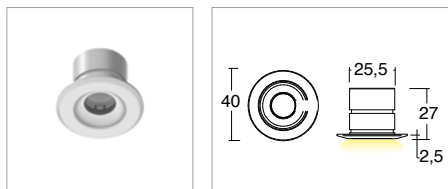

### INCLUDED



IP  
40

**650°C**  
GLOW  
WIRE TEST

Code: **3032**

SHAPE	FINISH	COLOUR	OPTICALS
Round	Light Grey ANODIZED	4000 K	20°
Square	White RAL 9010	3000 K	30°
	Black RAL 9005	2700 K	50°
		Red	120°
		Green	
		Blue	

### ACCESSORIES

305000002	Outer casing
330001900	(Vin 220/240 Vac) 350 mA - 5.6 W
330002000	(Vin 220/240 Vac) 350 mA - 16 W (min 4 W)
330006700	(Vin 220/240 Vac) 350 mA - 14 W - IP67
330007200	(Vin 220/240 Vac) 350 mA - 16 W (min 3 W) - Dimmer Push, 0-10, 1-10, DALI
307500045	Satin glass option

## Description

IP40 ceiling recessed spotlight, wattages 1 W. Installation with housing box on masonry. Available with round and square flange. Aluminium flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700 K - CRI 90 / 3000 K - CRI 90 / 4000 K - CRI 80, MacAdam Step 2. Optical lenses 20°/ 30°/ 50°/ 120° light emission. Indoor versions are supplied with a 150 mm cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25° C. Power supply must be ordered separately.