





KELVIN	CRI	REAL OUTPUT	ENERGY CLASS
2700	90	~ 180	F
3000	90	~ 180	F
4000	80	~ 230	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-2
 -- EN 62471 -- EN 62031



Syro 2.1 W

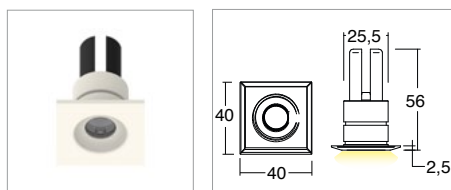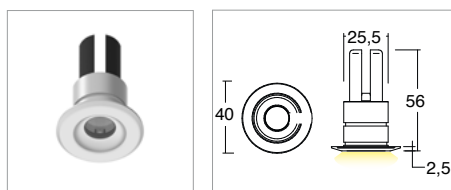

INCLUDED



IP
40

650°C
GLOW
WIRE TEST

Code: **3033**

SHAPE	FINISH	COLOUR	OPTICALS
Round	Light Grey	4000 K	20°
Square	White	3000 K	30°
	Black	2700 K	50°
		Red	120°
		Green	
		Blue	

ACCESSORIES

305000003	Outer casing
330010000	(Vin 220/240 Vac) 700 mA - 7.7 W - IP20
330009700	(Vin 220/240 Vac) 700 mA - 10 W - IP20
330009500	(Vin 220/240 Vac) 700 mA - 14 W - IP67
330009900	(Vin 220/240 Vac) 700 mA - 30 W (min 14 W) - IP67
330007800	(Vin 220/240 Vac) 700 mA - 20 W (min 7 W)
330007200	(Vin 220/240 Vac) 700 mA - 28 W (min 2 W) - Dimmer Push, 0-10, 1-10, DALI
307500045	Satin glass option

Description

IP40 ceiling recessed spotlight, wattages 2.1 W. Installation with housing box on masonry. Available with round and square flange. Aluminium flange, black anodised aluminium body. Finished by anodising or powder coating. Available in colour temperatures 2700 K - CRI 90 / 3000 K - CRI 90 / 4000 K - CRI 80, MacAdam Step 2. Optical lenses 20°/ 30°/ 50°/ 120° light emission. Versions are supplied with a 150 mm cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25° C. Power supply must be ordered separately.