





KELVIN	CRI	REAL OUTPUT	ENERGY CLASS
2700	90	~ 530	F
3000	90	~ 670	F
4000	80	~ 700	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



EsyR 6.7 W

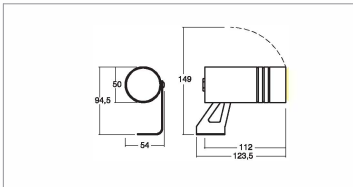

Code: **3400**

SHAPE	FINISH	COLOUR	OPTICALS
Round	Antracite	4000 K	20°
	White	3000 K	40°
	Grey	2700 K	60°
	Black		Diffused
	Cor-ten		

ACCESSORIES

307500010	Neoprene cable 2x0.5
307500019	Steel picket
307500029	Non dazzling system
330009700	(Vin 220/240 Vac) 700 mA - 10 W - IP20
330009500	(Vin 220/240 Vac) 700 mA - 14 W - IP67
330009900	(Vin 220/240 Vac) 700 mA - 30 W (min 14 W) - IP67
330007800	(Vin 220/240 Vac) 700 mA - 20 W (min 7 W)
330007200	(Vin 220/240 Vac) 700 mA - 28 W (min 2 W) - Dimmer Push, 0-10, 1-10, DALI

Accessory Asymmetrical telescope

Description

IP66 adjustable spotlights for outdoor use, wattage 6.7 W. Installation with steel bracket or spike. Round shape, anodised aluminium body. Finish obtained by powder-coating. Available in colour temperatures 2700 K- GRI 90 / 3000 K- GRI 90 / 4000 K- GRI 80, MacAdam Step 2. Optical lenses 20° / 40° / 60° diffused light emission. Supplied with 1 m of 3x1 mm section neoprene cable. Durability L80 B20 at 100.000h Ta (ambient temperature) 25° C. Power supply must be ordered separately.