

KARAH L.E.

Wall lamp




KELVIN	CRI	REAL OUTPUT	ENERGY CLASS
2700	90	~ 305/305	G
3000	90	~ 320/320	G
4000	80	~ 415/415	F

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031



Karah L.E. D/I 9.6 W

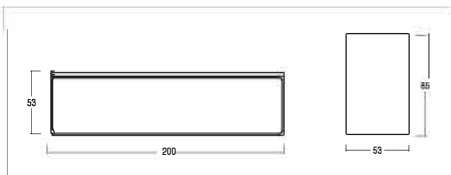

W
9,6

Code: **3408**

SHAPE	FINISH	COLOUR	OPTICALS
Square	Anthracite ■ RAL 7016 White □ RAL 9010 Grey ■ RAL 7042 Black ■ RAL 9005 Cor-ten ■ SX350F MA.SA.	4000 K 3000 K 2700 K	Diffused

ACCESSORIES

330003300	(Vin 220/240 Vac) 24 Vdc - 20 W
330003400	(Vin 220/240 Vac) 24 Vdc - 60 W
330003500	(Vin 220/240 Vac) 24 Vdc - 35 W
330003100	(Vin 220/240 Vac) 24 Vdc - 100 W
330007100	(Vin 220/240 Vac) 24 Vdc - 150 W
330006600	(Vin 220/240 Vac) 24 Vdc - 60 W - Dimmer Push
330008101	(Vin 24 Vdc) - 240 W - Dimmer Push, 0-10, 1-10
330008102	(Vin 24 Vdc) - 240 W - Dimmer Push, 0-10, 1-10, DALI

Description

Outdoor wall lamp IP 65 direct light with wattage 4.8 W per emission. Installation with bracket without visible screws. Rectangular shapes. /Aluminium body, powder-coated finish. Available in colour temperatures 2700K- GRI 90 / 3000 K- GRI 90 / 4000 K- GRI 80, MacAdam Step 2. Optics diffuse light emission. Service life L80 B20 at 100.000h Ta (ambient temperature) 25° C. Power supply must be ordered separately.