


lighting solutions



ledluks

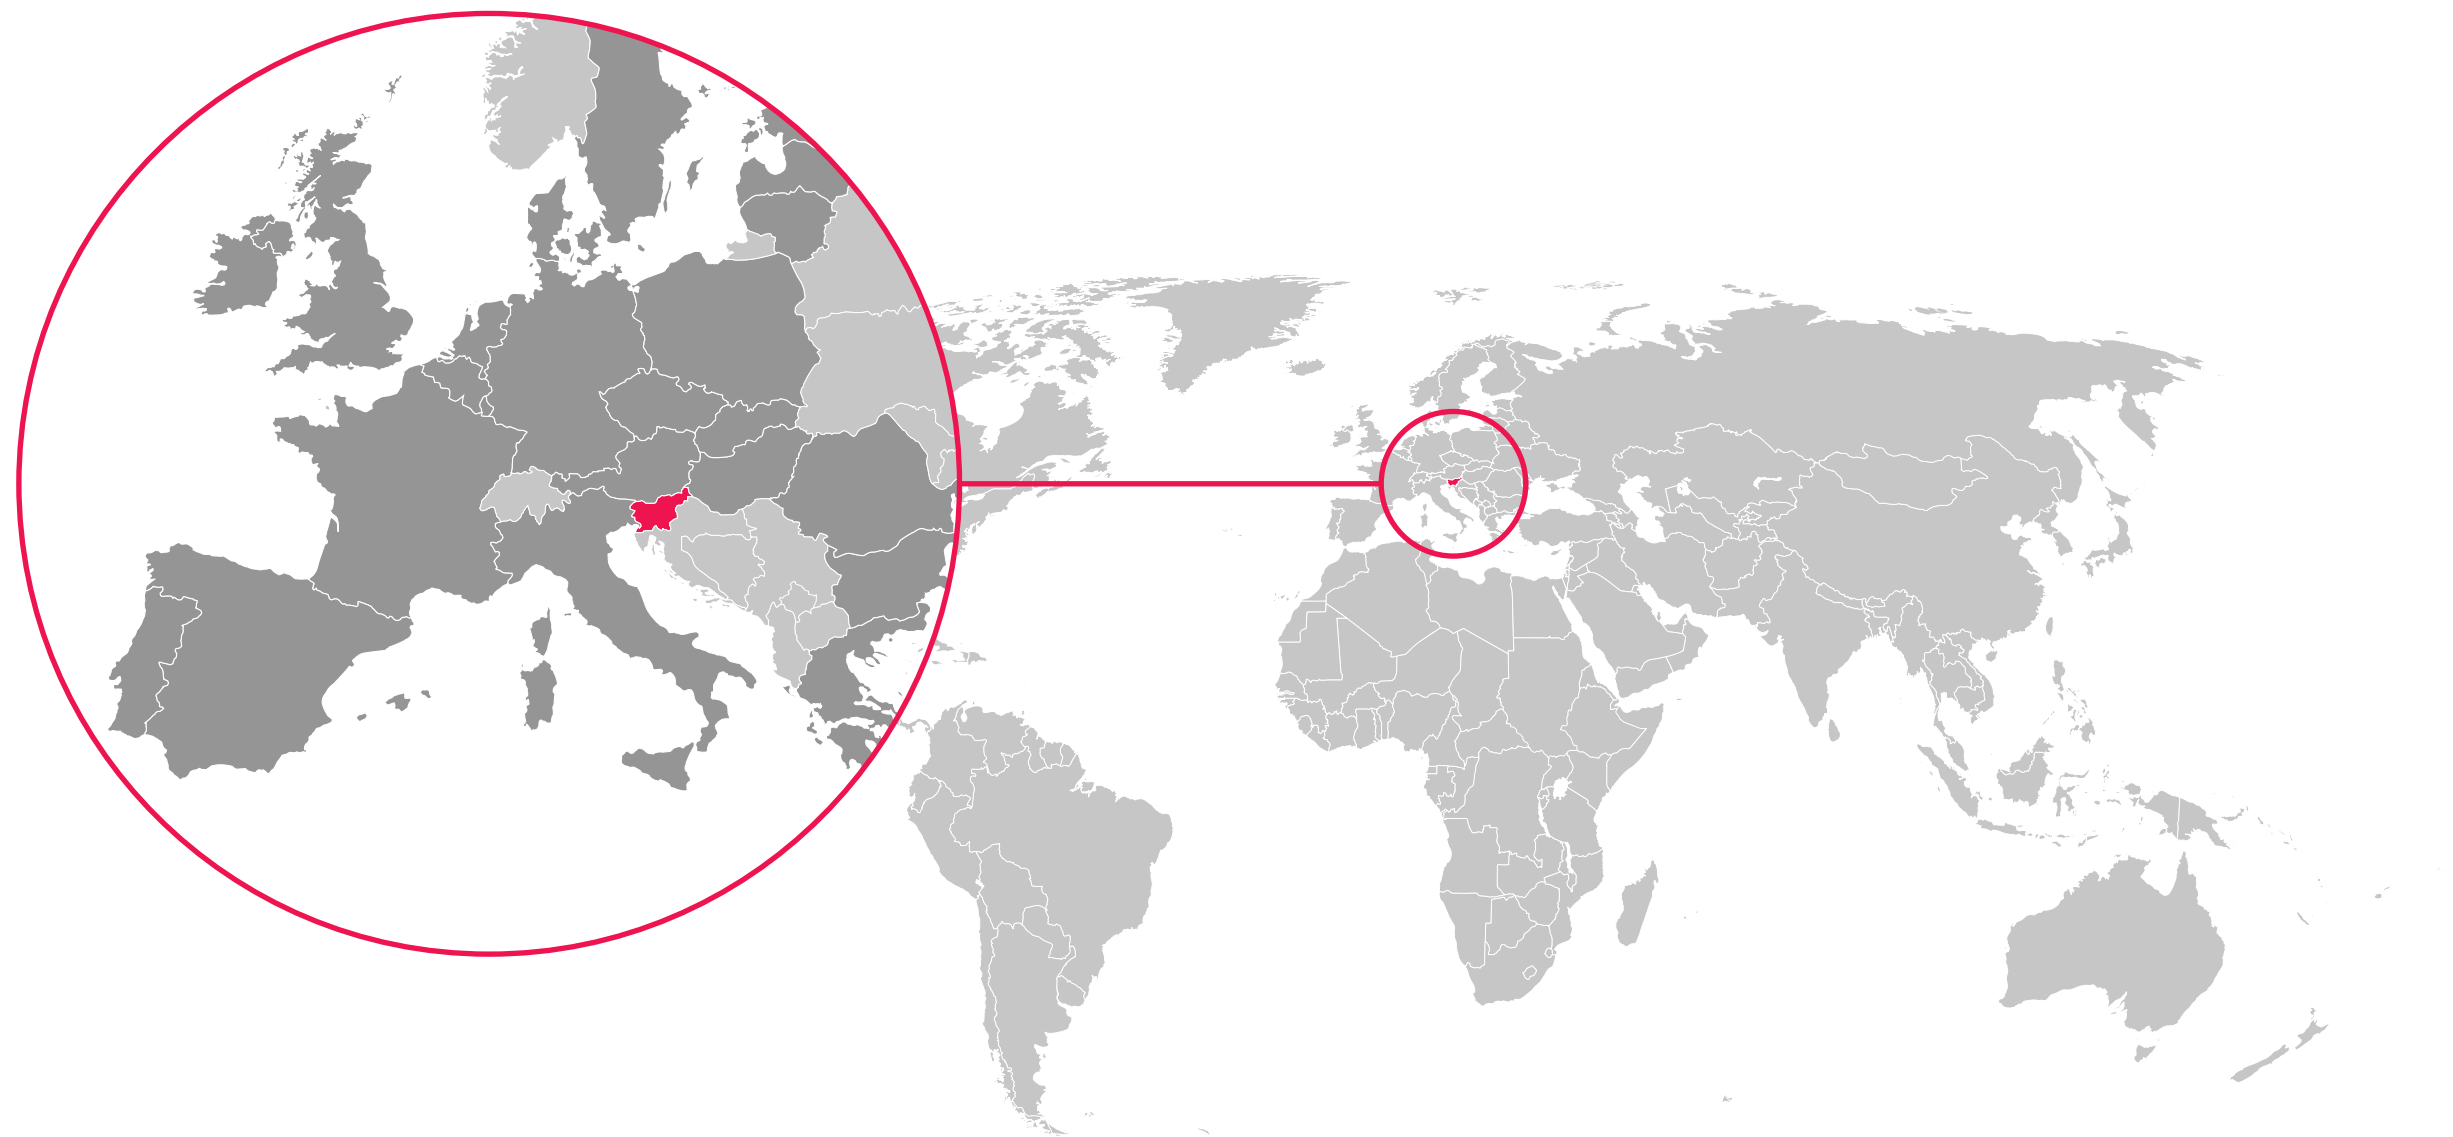

# Slovenia, EU

lighting solutions



# Focused on long lasting quality and steady growth

- founded in 2013
- annual 15-30% income growth
- team of 33 people: flexibility, responsiveness, long-term relationship
- portfolio of 13 high-quality product families



# Top management Dino Feragotto

lighting solutions

- Founder and majority owner of the company
- serial entrepreneur of successful big companies, also listed on stock market
- President of Confindustria Slovenia,
- Vice president of Confindustria\* Udine
- Sole director of Friuli Inovazione (Italian technological park)

---

\* main association representing manufacturing and service companies in Italy





# Top management Matija Klinkon

- Founder and CEO
- technological and entrepreneurial background
- mentor for start-up companies
- president of Lighting engineering society of Slovenia

lighting solutions

# In-house design, development and manufacture of high- quality LED luminaires

collaboration with main photometry laboratories,  
institutes and universities





# Carefully selected components from top suppliers

Trust and close collaboration with partners enable us to have access to latest developments in the market and to be early adopters of new technologies, which we integrate in our products.

Partners:

drivers from Helvar (Finland), plastic diffusers from BWF (Germany), LEDs from Seoul Semiconductors (South Korea), aluminium profiles from Profilati (Italy), ...



# Internally designed and tested PCB boards for high-quality performance


Collaboration with external contract  
manufacturers for a reliable performance.






# Spectra with Sunlike LEDs. The closest light to the sunlight spectrum.



Commercial LED

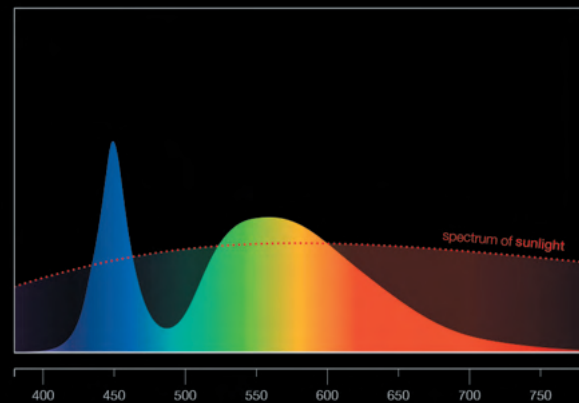

Spectra Technology - Sunlike LEDs

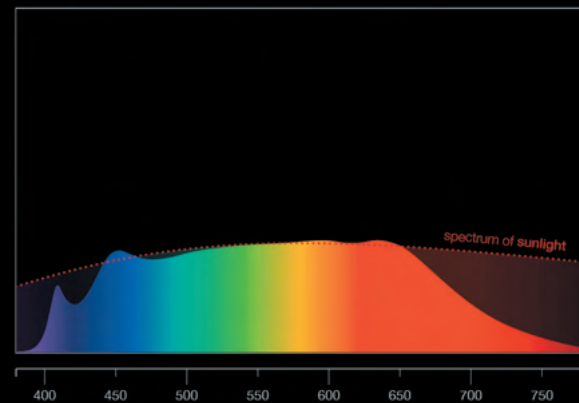

CRI (CQS) details

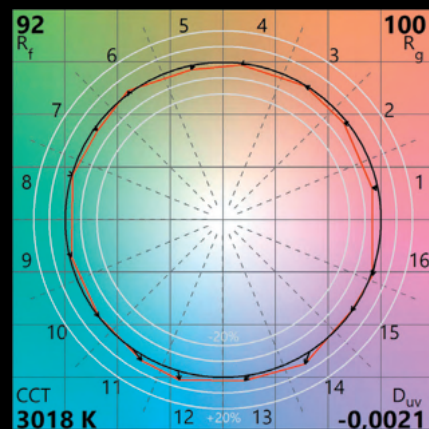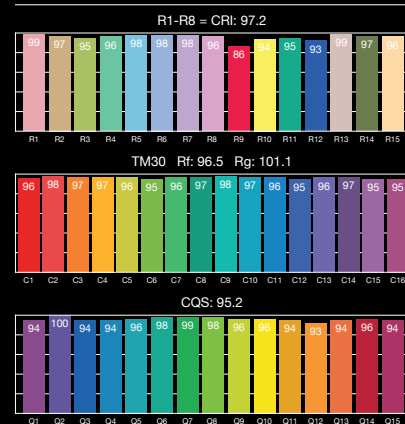

CRI > 95

SunLike  
Powered by







performance driven  
Tunable White. Replicates natural  
light and dark cycles inside  
homes and offices.

Positive impact on the human biorhythm,  
health, sleeping quality, effectiveness and  
concentration at work and school. Available  
also with Sunlike LEDs.



# Light management system:

- presence and daylight sensors
- DALI systems
- smart phone control
- EM1h and EM3h



Adjust the lighting according to your needs.



# Made in EU, 5 year warranty



OFFICES



EDUCATION



HOSPITALITY




ARCHITECTURAL



INDUSTRY / SPORT



EXHIBITION

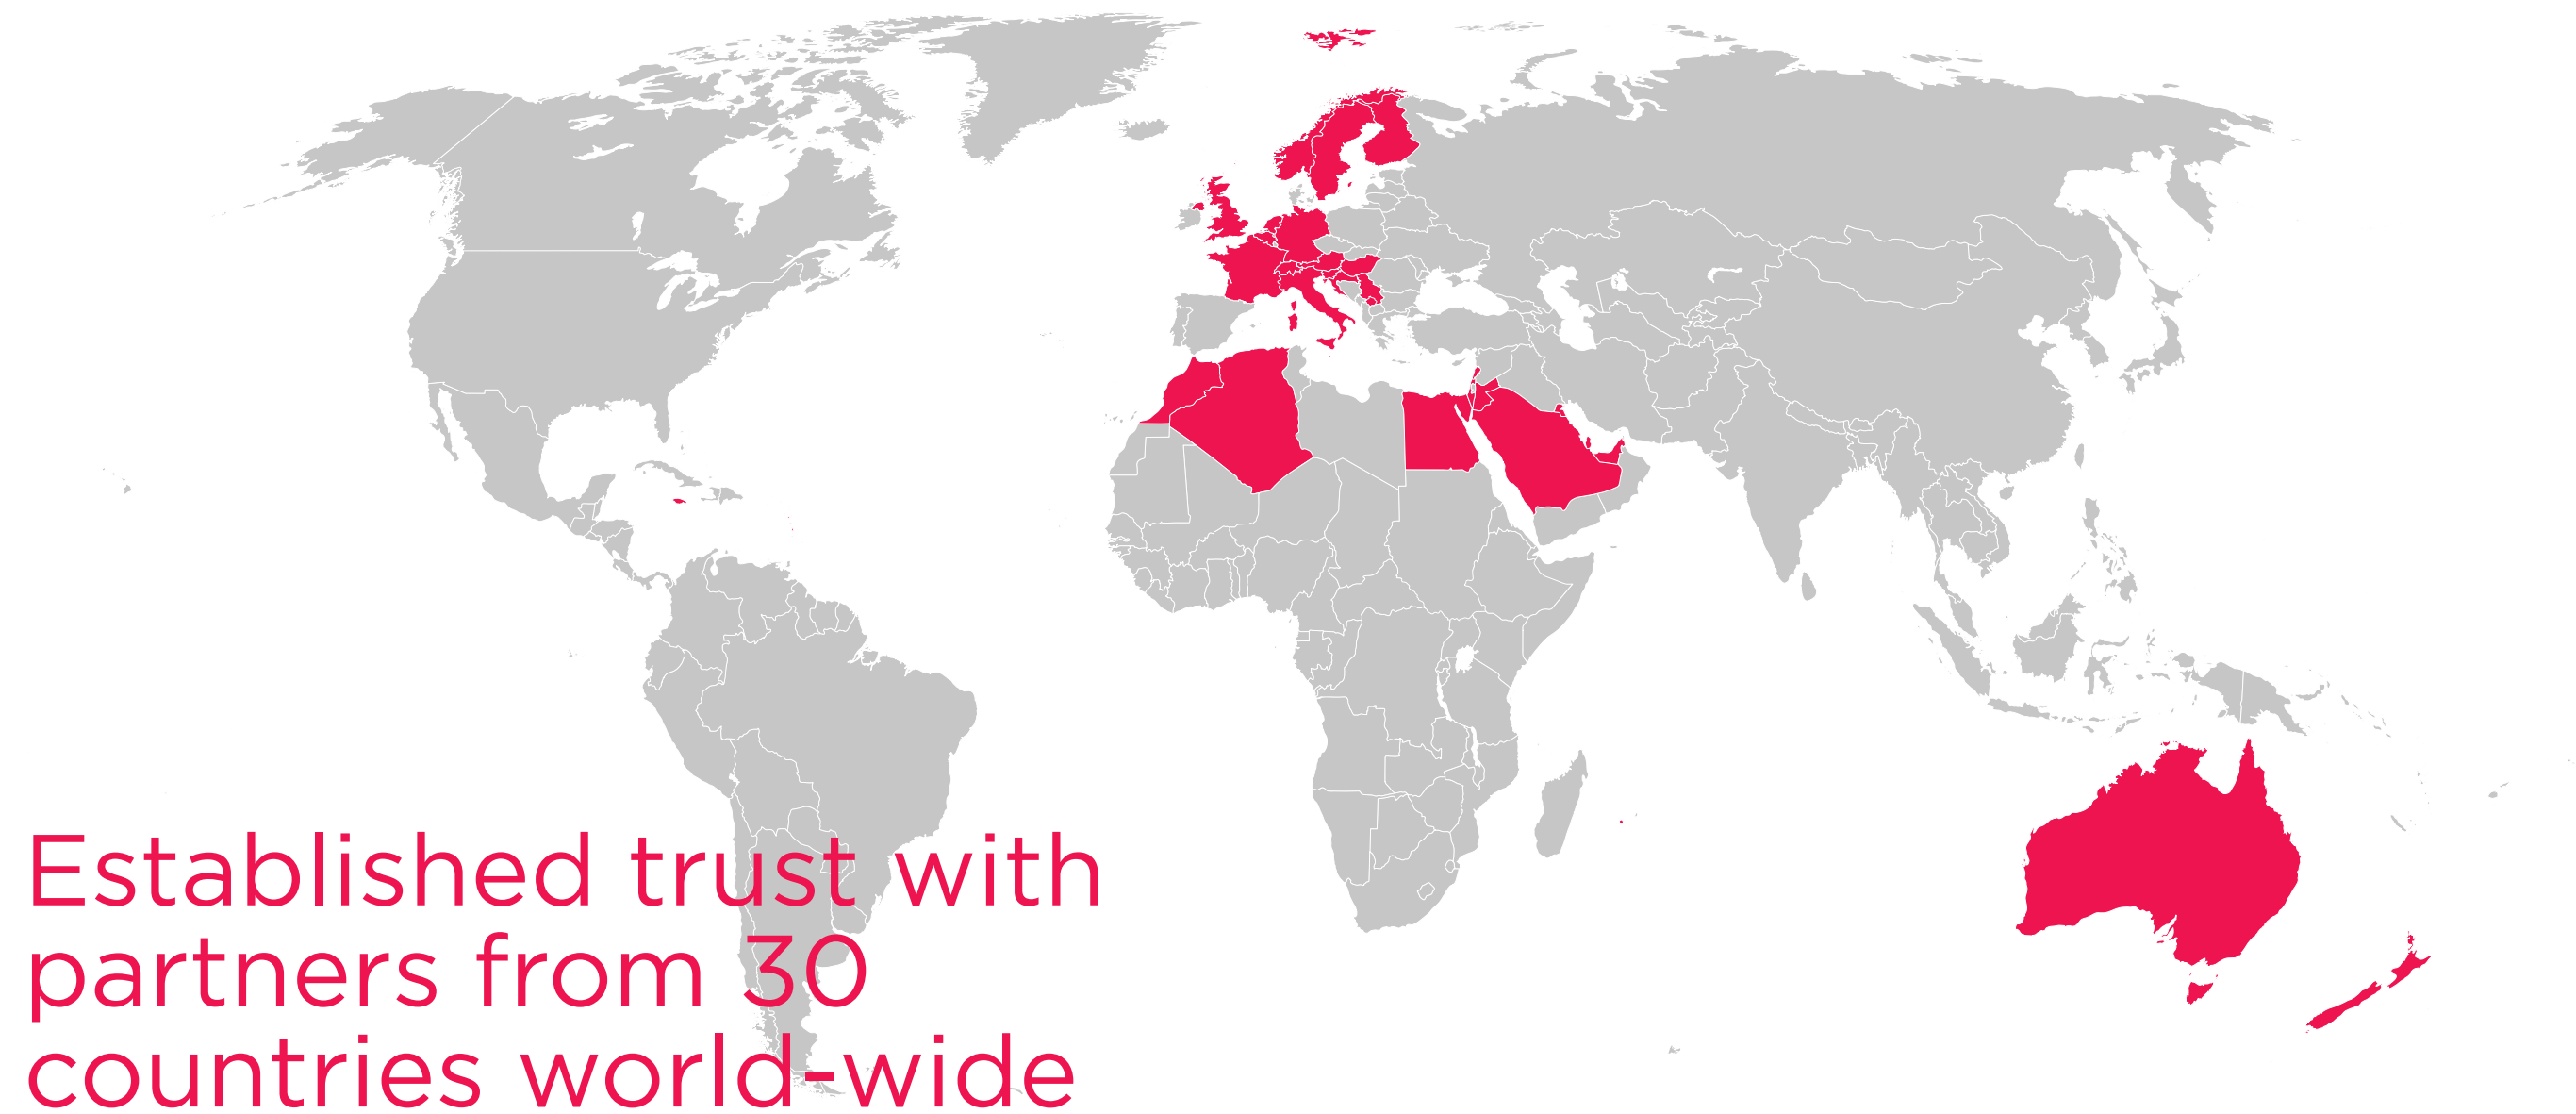

Established trust with  
partners from 30  
countries world-wide






# Product families



EOS




EOS CIRCULAR




EOS SYSTEM



PLAIN



KYRA




PROFILES: ILO



ILO MINI



APOLLO



ORA



IKAR



ARUN



ALVA





HYPERION ALU



HATOR

# MINI ILO


The shortest member of ILO family

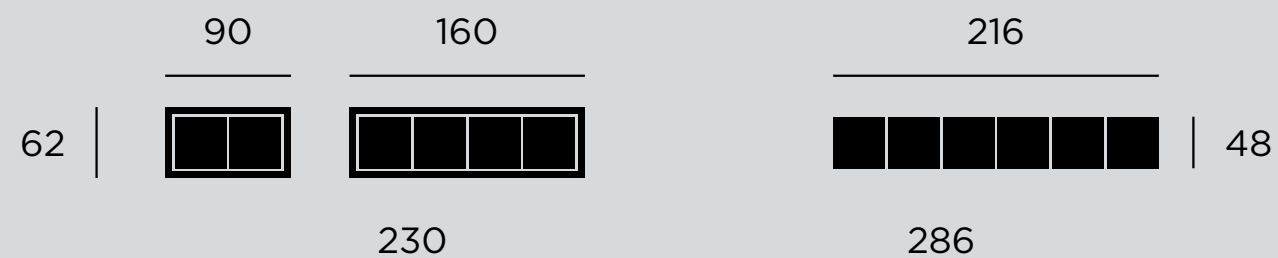

- 2700 / 3000 / 4000 / 5000K
- RA>80 / RA>90
- McAdam Step 3
- UGR<16
- L80 B20 at 100.000h, Ta=25°C ambient temperature

# MINI ILO

Minimalistic, yet impressive.

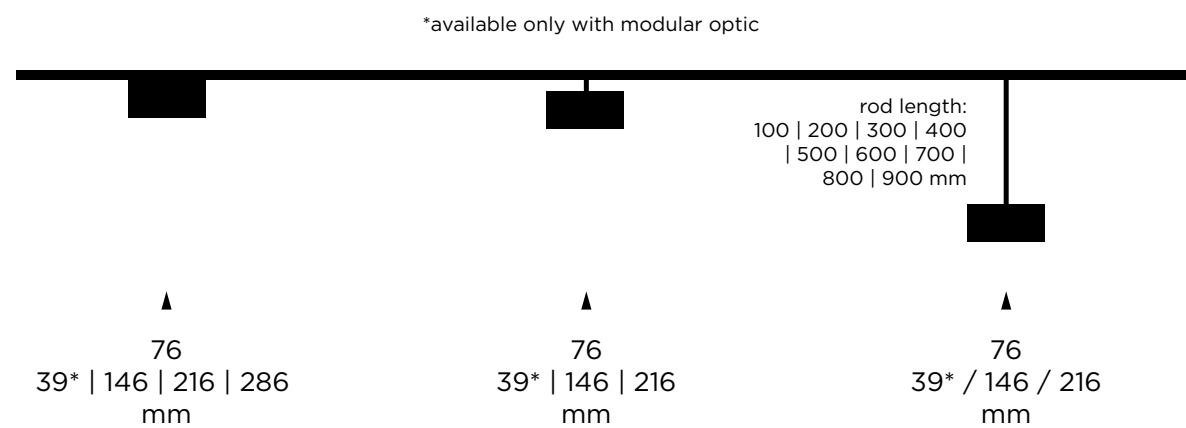

lighting solutions






# Mounting versions



recessed



asymmetric

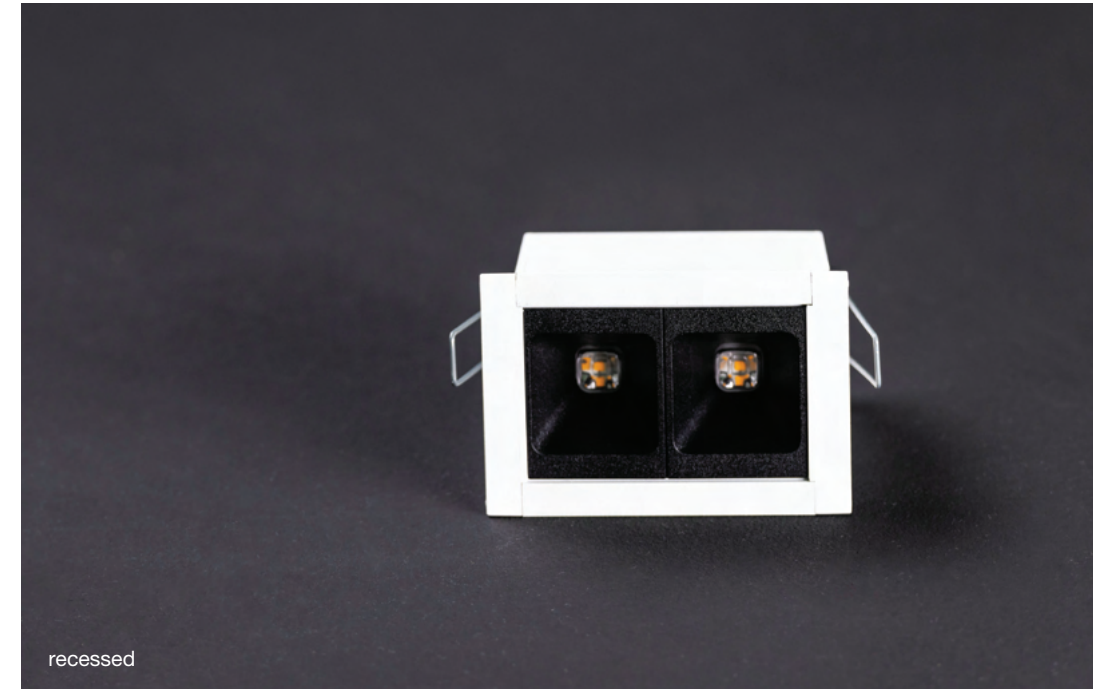

recessed



track with rod



track / track with hinge



# IKAR

## Ring-shaped luminaire

- 2700 / 3000 / 4000 / 5000 K
- RA>80 / RA>90
- L80 B20 at 100.000h
- High-quality aluminium housing with powder coated finish
- Optics: specially-designed optical lenses



lighting solutions



GERMAN  
DESIGN  
AWARD  
WINNER  
2020



IDA  
DESIGN  
AWARDS  
GOLD  
WINNER  
2017




BIGSEE  
PRODUCT DESIGN  
AWARD 2020  
WINNER

 ledluks



# Mounting versions

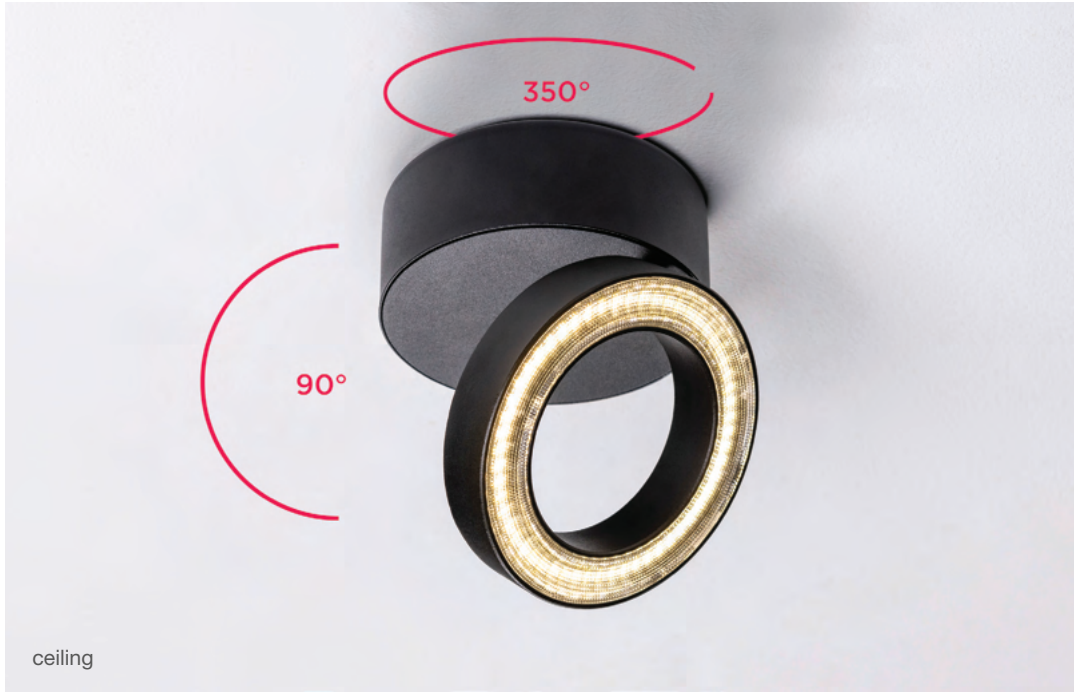



















# APOLLO



ø 450, 650

- 2700 / 3000 / 4000 / 5000K
- RA>80 / RA>90
- McAdam Step 3
- L80 B20 at 100.000h, Ta=25 C ambient temperature
- High-quality aluminium housing with powder coated finish
- Diamond prism + Opal (DOP) / Opal





Slim design

60 mm





DALI

CASAMBI

NO  
DIM

# EOS CIRCULAR

From transparency to  
homogenous light.

- 3500 - 10000 lm
- 39 - 140 W
- 2700 / 3000 / 4000 / 5000 K
- RA > 80 / 90
- High-quality aluminium housing with powder coated black or white fine texture.











# EOS

Minimalism. Style. High visual comfort.

- high-quality aluminium housing with black or white powder coated finish
- available size 1200x300 mm, 1200x450 mm, 1500X300 mm and 1500X450 mm
- RA > 80 / 90
- 2700 / 3000 / 4000 / 5000 K

















# EOS SYSTEM

Pendant modular system for  
special applications

- 2700 / 3000 / 4000 / 5000 K
- CRI > 80 / 90
- high-quality aluminium housing  
with powder coated black or white  
fine texture




DALI

NO  
DIM





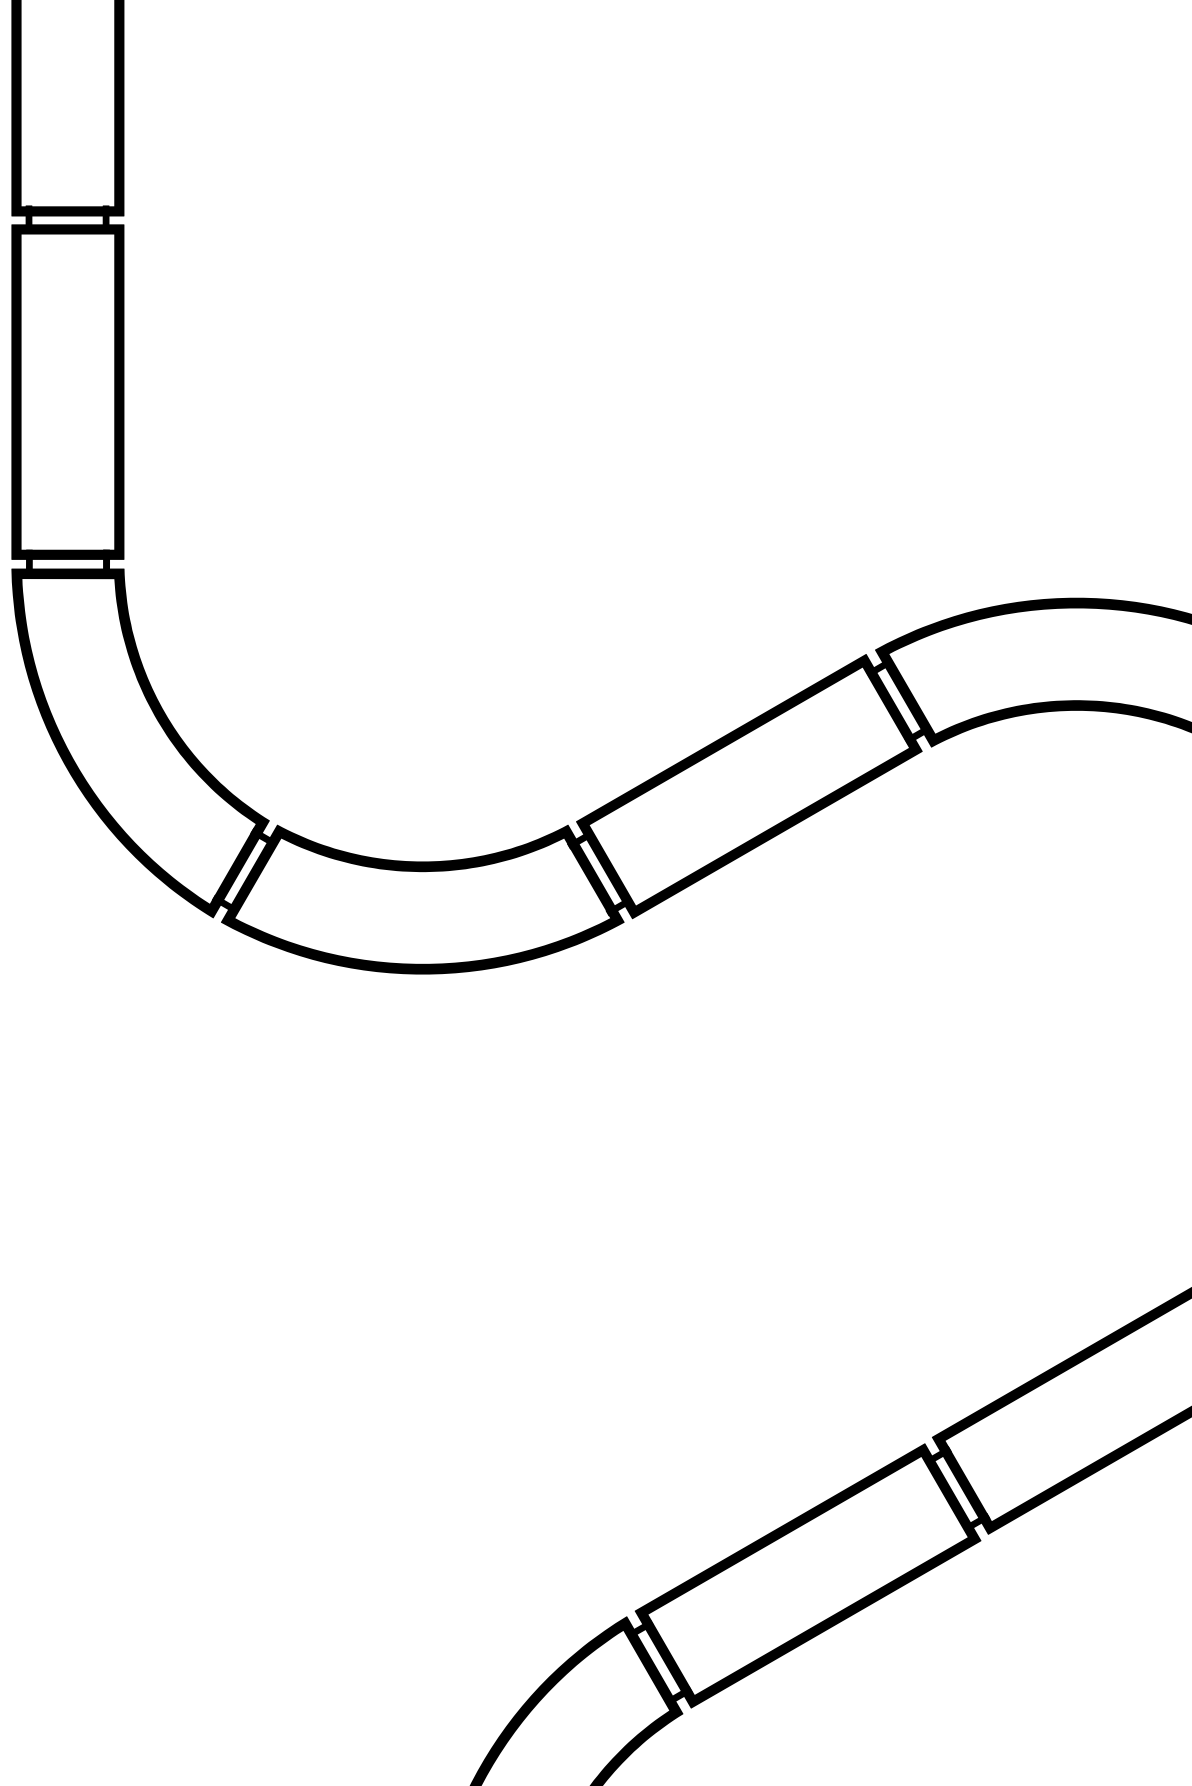







# SHAPES<sup>ILO</sup>



## Quadro

### Dimensions

Rectangular: 900x1500, 900x1800,  
900x2400, 1200x1500, 1200x1800,  
1200x2400 mm

Square: 600X600, 900X900,  
1200X1200, 1500X1500,  
1750X1750 mm



NO  
DIM

DALI

SWITCH  
DIM

FLICKER  
FREE  
DIM

DALI  
2 CH

CASAMBI

## Hexagon

### Dimensions

ø 780, 1200, 1480,  
1760 mm







# PROFILES




ILO

35




50



70

coming  
soon




ORA

80




60

coming  
soon

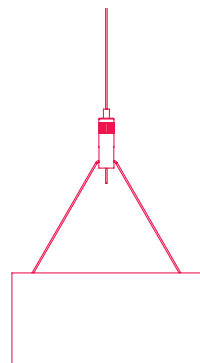

KYRA

125



90


PLAIN





# ILO

Continuous light-line system.  
One product, multiple applications.

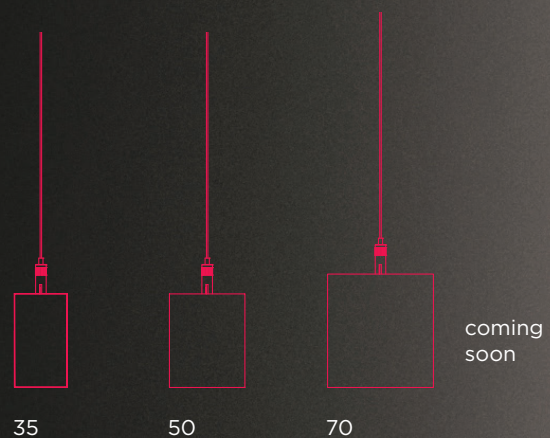

lighting solutions






# ILO


Continuous light-line system.  
One product, multiple applications.




Prismatic




Opal




Nero




Asymmetric




Modular narrow



Modular wide



Direct / Indirect

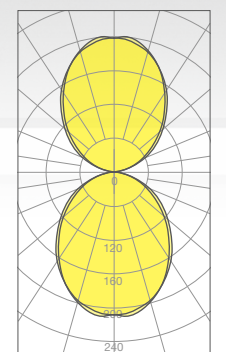



# ILO

## Innovative concept: Quick connection system

- easy on-site assembly
- faster production times
- no light-leakage






# LINES ILO

Configure your continuous light-lines and create unique lighting applications

lighting solutions


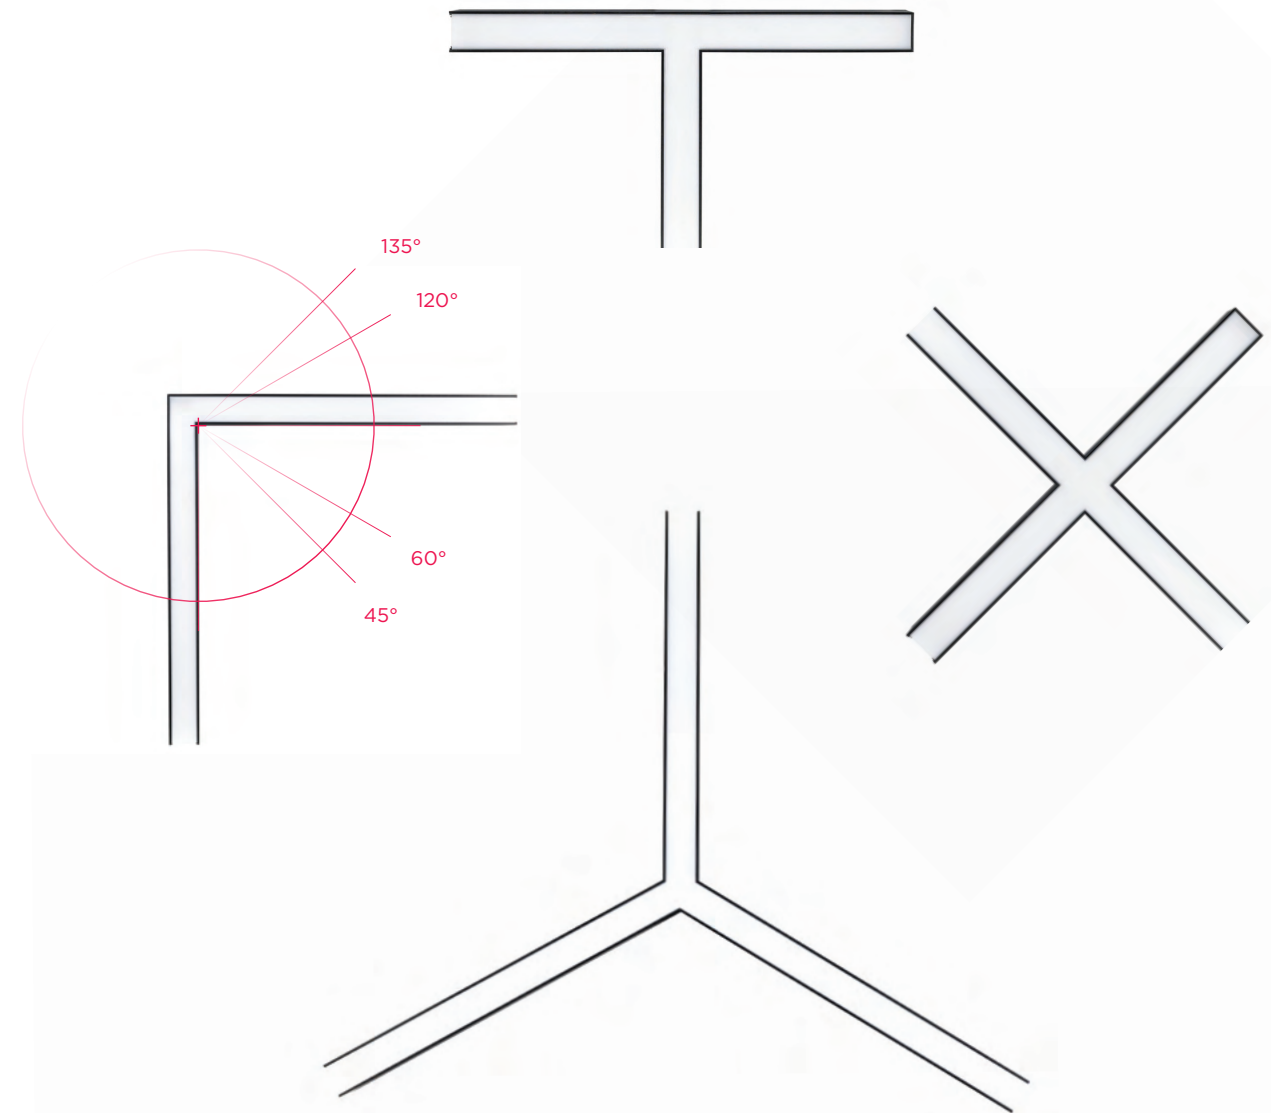


 ledluks



Other options

T-BAR ILO

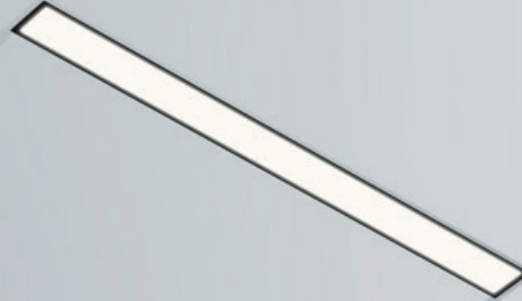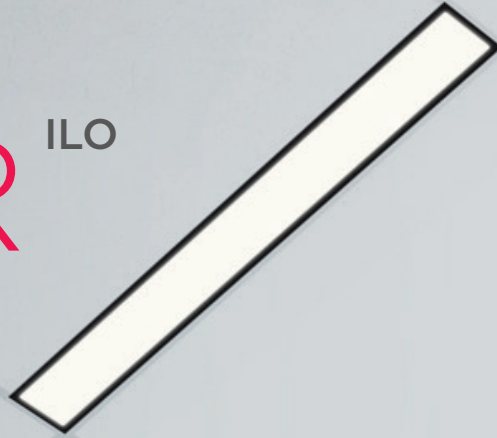


ILO system combinations




# ILO 50

Continuous light-line system.  
One product, multiple applications.

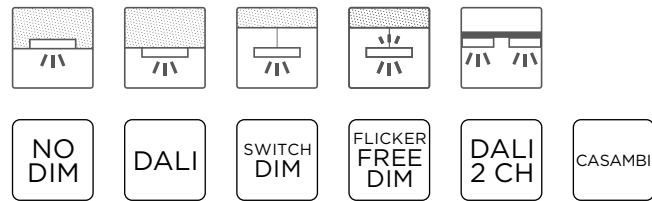

- black, white or gray painted high-quality aluminium profile
- 125 lm/W
- 2000-4000 lm/m
- 30-60 W/m
- CRI > 80 / 90 / 95
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- length: from 580 mm ... + 70 mm ... up to 2820 mm in one piece

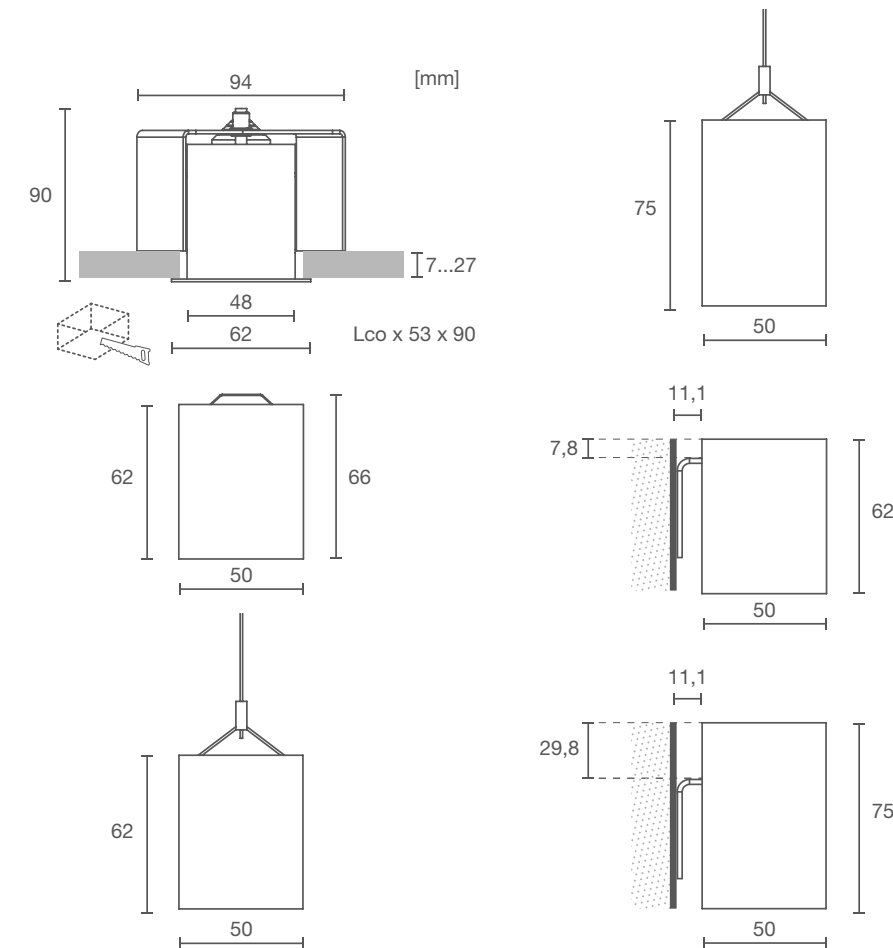

ILO Spectra:  
now available also with  
Spectra technology and  
Tunable White functionality.


**SunLike** SEOUL  
Powered by



# ILO 35

Continuous light-line system.







One product, multiple applications.

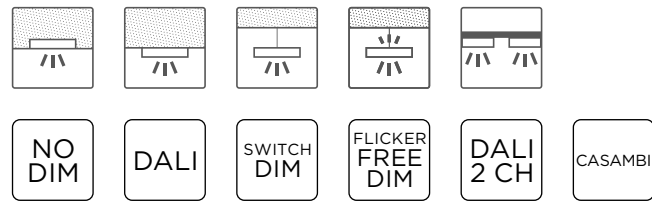

- black, white or gray painted high-quality aluminium profile
- 110 lm/W
- 1700-3200 lm/m
- 30-60 W/m
- CRI > 80 / 90 / 95
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- length: from 580 mm ... + 70 mm ... up to 2820 mm in one piece

ILO Spectra:  
now available also with  
Spectra technology and  
Tunable White functionality.


**SunLike**  
Powered by 

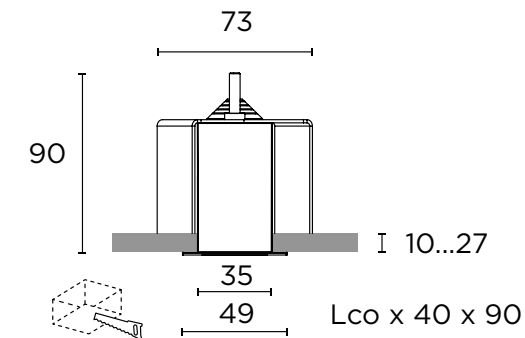




# ILO 70

Continuous light-line system.  
One product, multiple applications.

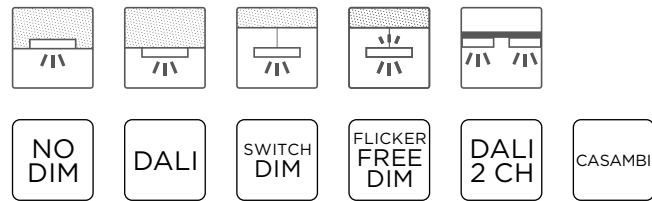

- black, white or gray painted high-quality aluminium profile
- 115 lm/W
- 1700-3200 lm/m
- 30-60 W/m
- CRI > 80 / 90 / 95
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- length: from 580 mm ... + 70 mm ... up to 2820 mm in one piece

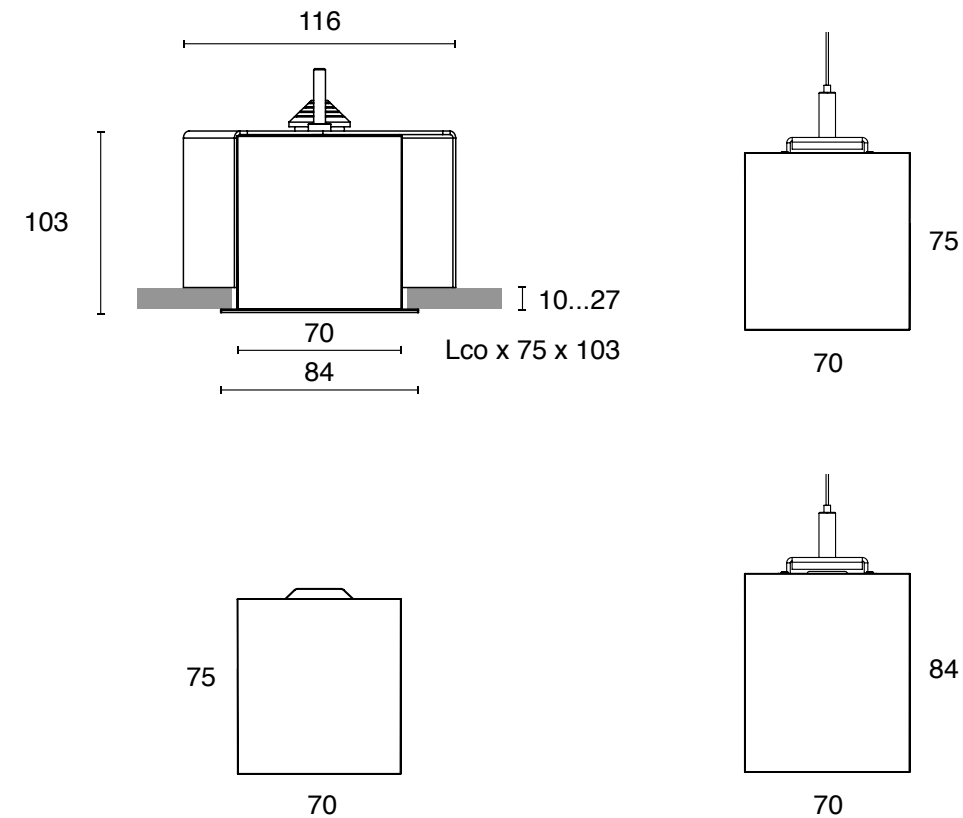

ILO Spectra:  
now available also with  
Spectra technology and  
Tunable White functionality.

**SunLike** SEOUL  
Powered by
























# ORA


Curved-edge linear profile



- black, white or gray painted high-quality aluminium profile
- 125 lm/W
- 2000-3000 lm/m
- 20-30 W/m
- CRI > 80 / 90 / 95
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K



80



60

coming soon





# LINES<sup>ORA</sup>

Seperate units can be connected together in longer linear lines with no visible joints.









# HEXAGON<sup>ORA</sup>




lighting solutions

 ledluks



# PLAIN

**Nordic design.** Designed by Kai Piippo for Annell.  
**Superior performance.** Manufactured and produced  
by LED Luks.



90



NO  
DIM

DALI

FLICKER  
FREE  
DIM

SWITCH  
DIM

DALI  
2 CH

CASAMBI

PULL  
SWITCH  
DIM

- suspended luminaire with elevated light opening
- 130 lm/W
- high-quality aluminium housing with structure lacquered matt white
- combination of different modules to continuous light-lines system
- available sizes 1300 mm and 1600 mm
- CRI > 80 / 90 / 95
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- option of stand-alone sensor Active+

 annell

**Plain Spectra:**  
now available also with Spectra technology  
and Tunable White functionality.

**SunLike**  
Powered by 





















# KYRA

Low UGR.  
Ideal for offices.

- high-quality aluminium housing with black, white or grey powder coated finish
- available sizes: 1200, 1500, 2400 and 3000 mm
- $UGR < 16$
- 2700 / 3000 / 4000 / 5000 K or TW 2700-5000 K
- $CRI > 80 / 90 / 95$
- option of stand-alone sensor Active+

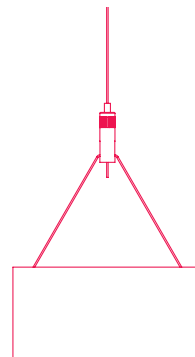
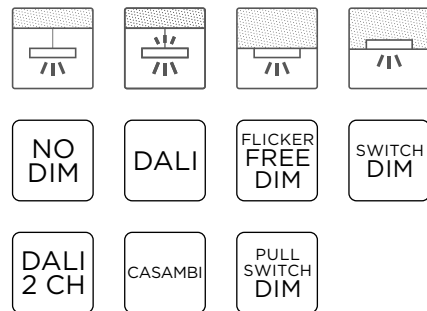


125





# KYRA RECESSED + RECESSED SYSTEM

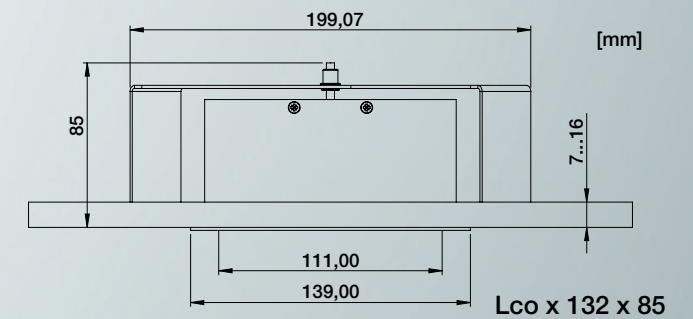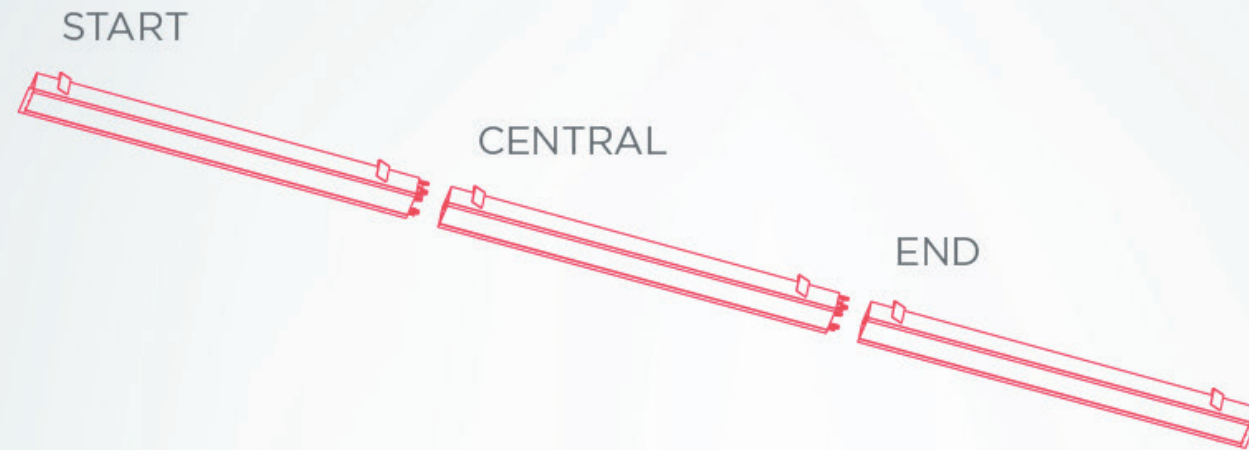




# KYRA T-BAR

For suspension ceilings with grid







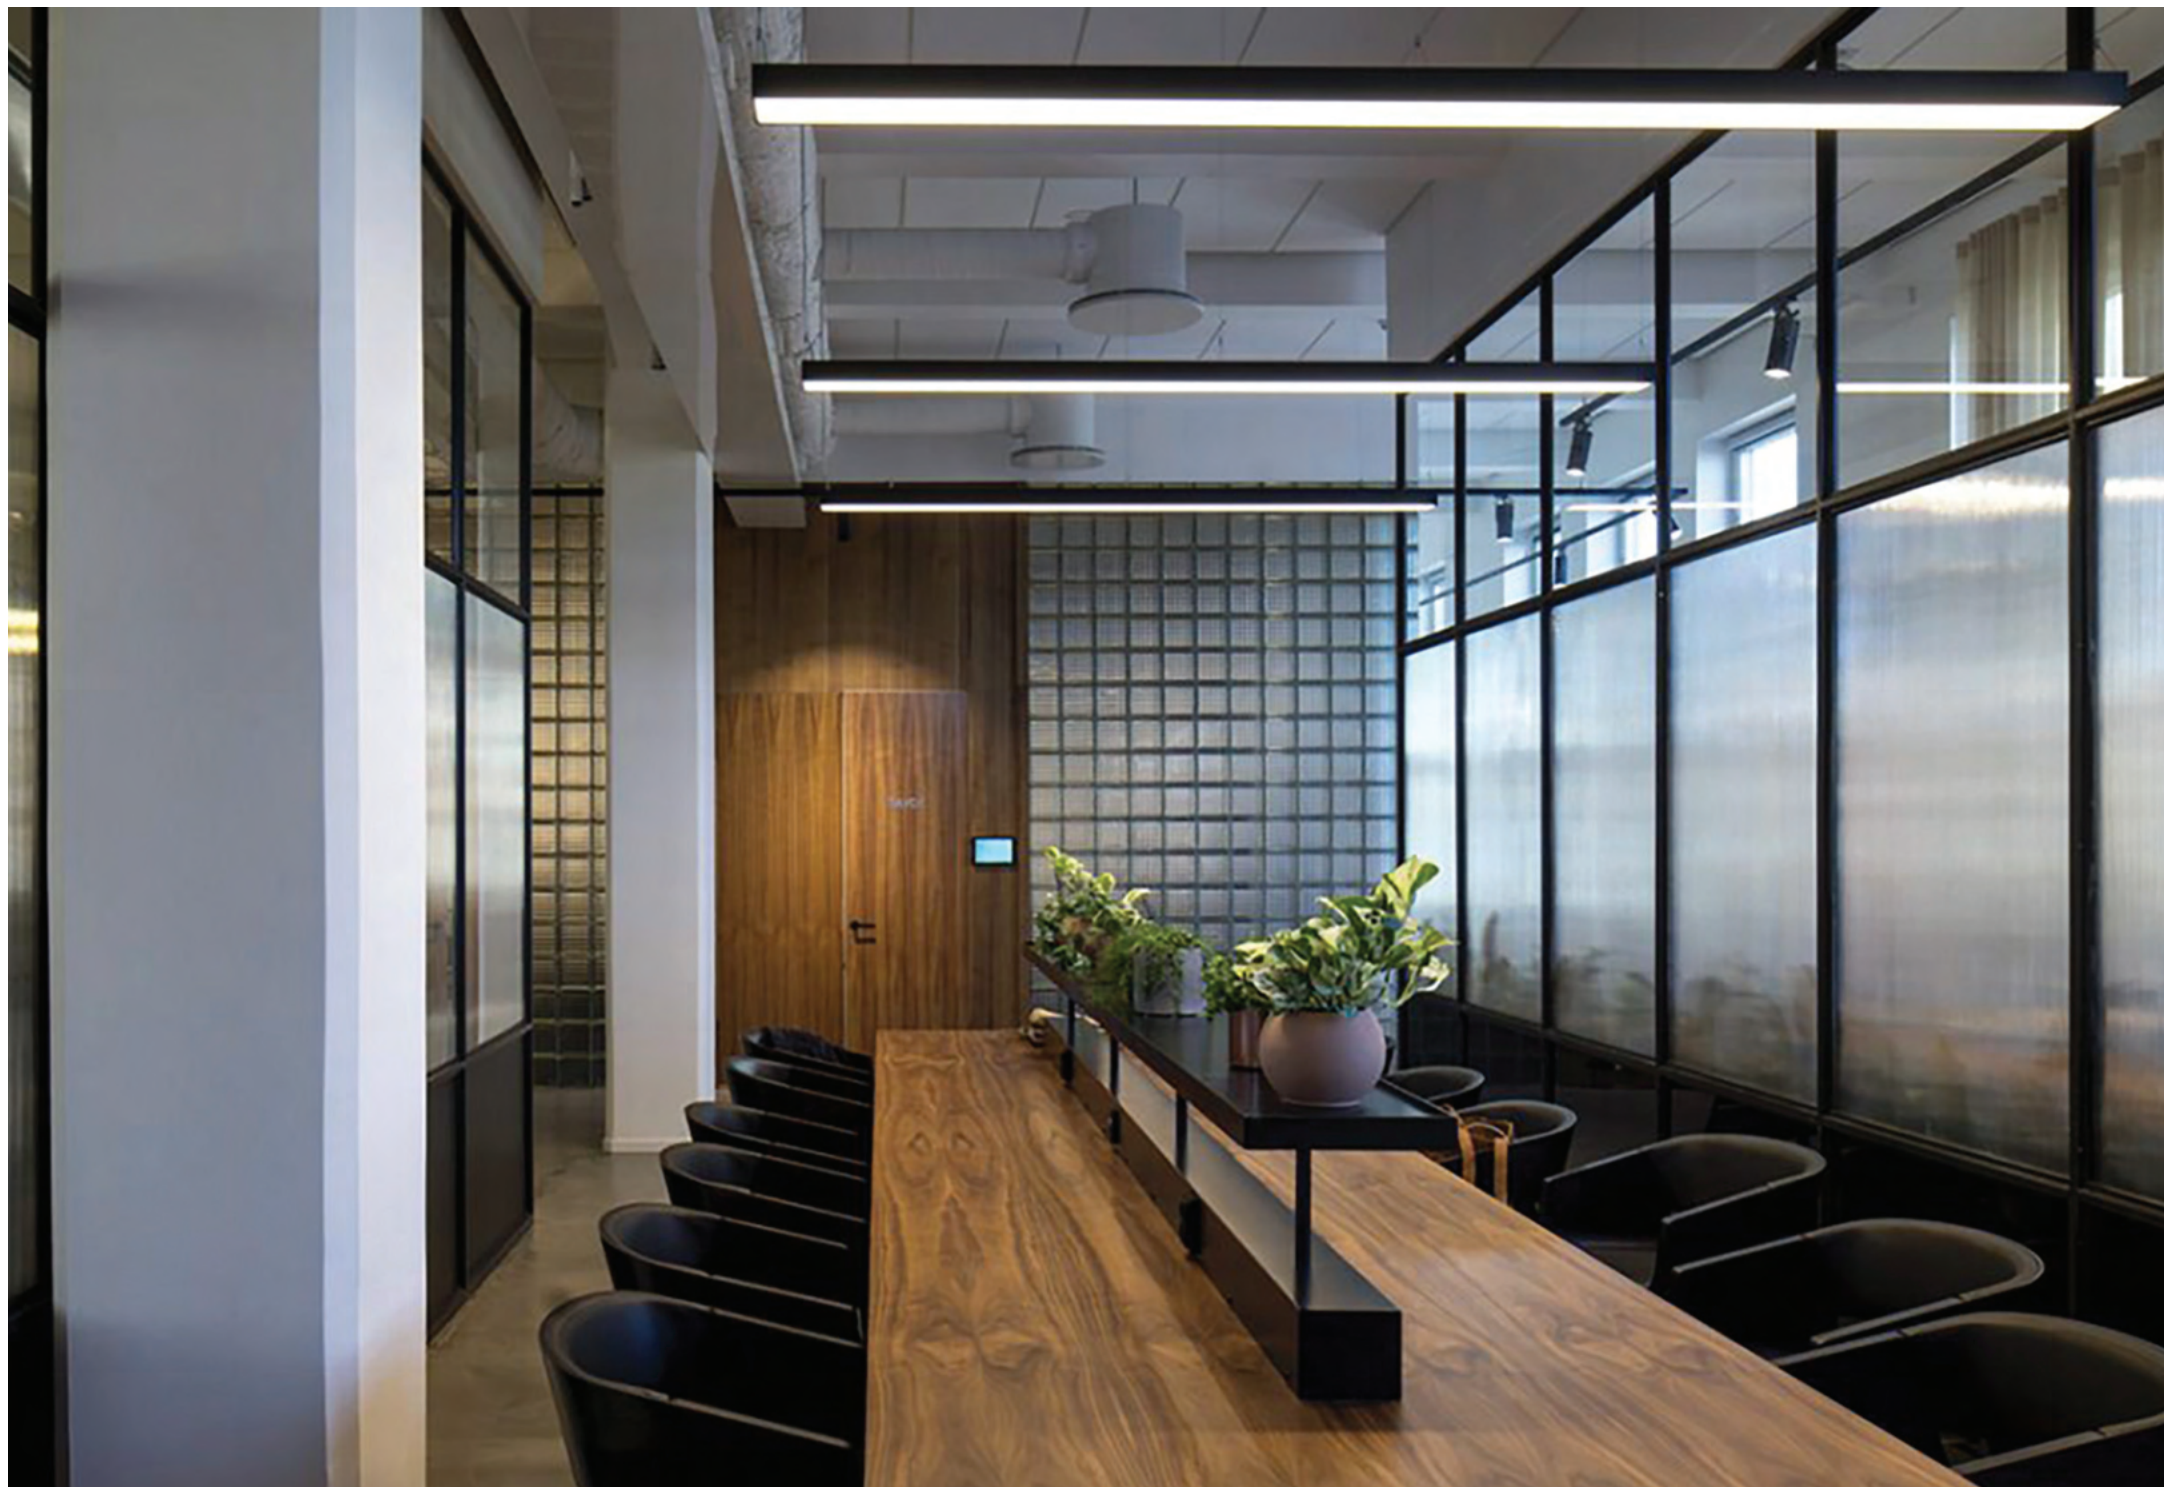








# Fast and easy to find the right technical info for the product you need


User-friendly Products' Configurator to work with.

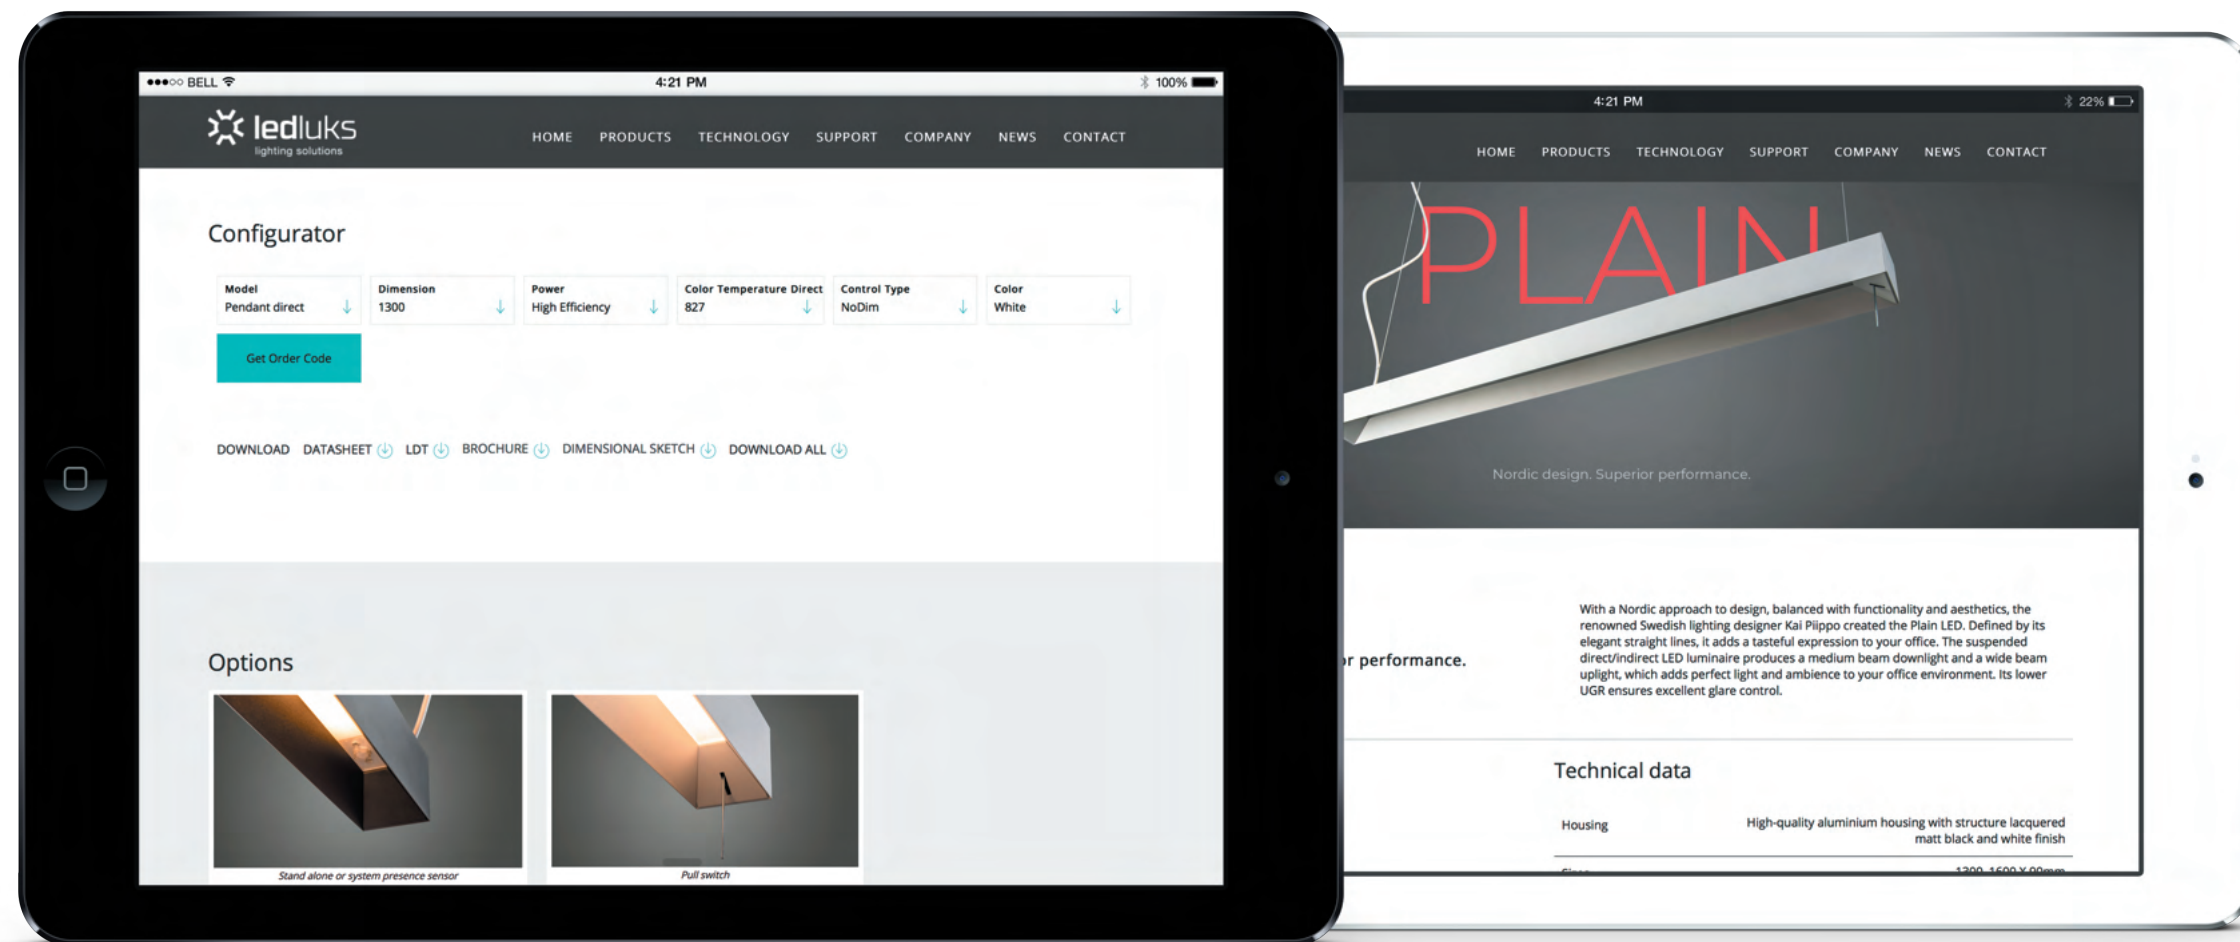



# Project Configurator

Fast and easy to select the right products while working on a project

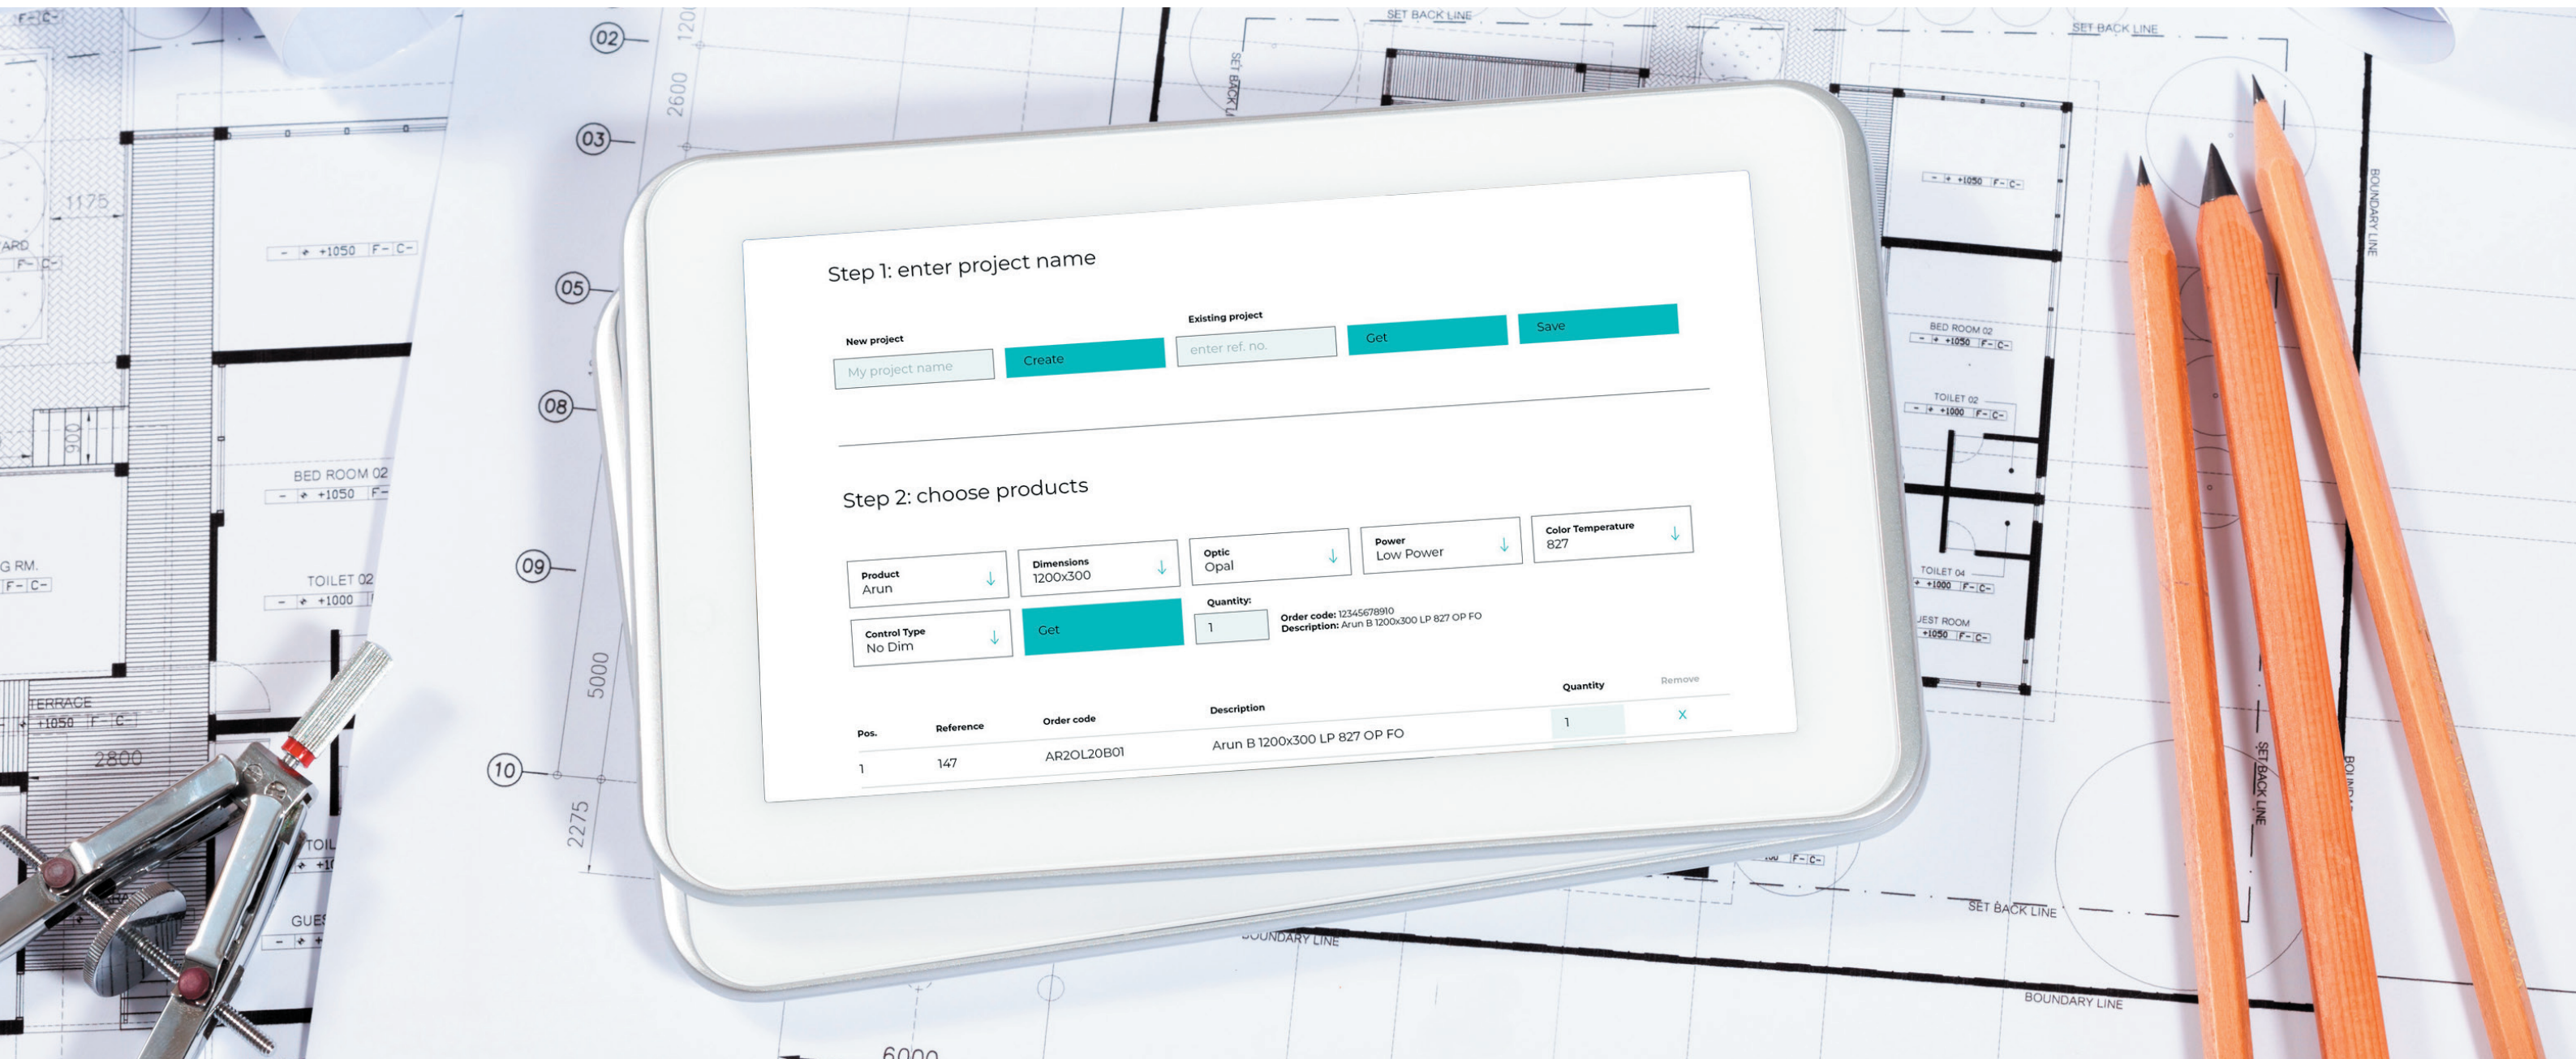



Inpired by the

SUN.

