



Kyra LED impresses with its up to 3 meters long elegant housing, bringing you more quality light and cost-savings.

KYRA

LED

Infinite beam of light.

LED

TW
based on

100%
EU

120
lm/W

Direct/indirect luminaire

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light and enables less luminaires per room. Therefore, it is most suitable for open-space offices, corridors, foyers, conference areas, classrooms and other spacious environments.



Slim design

Pendant or ceiling mounted luminaire


Thanks to its sophisticated shape, both versions visually upgrade the room without dominating it. Different features, like the Tunable White option and direct/indirect lighting, are possible, making your office a comfortable, stimulating and healthier working environment.



new Kyra Spectra

Light, close to the natural sunlight spectrum

Choose Kyra Spectra to obtain a perfect color reproduction in your office. It is most appropriate for ambiances, like: exhibition facilities such as museums, fine art painting stores, fashion departments, graphic design studios, printing stores, fine jewellery stores, etc.



Excellent color rendering property.

For more information see page 5.


Sizes	Features	Materials	Options
1200, 1500, 2400, 3000 X 125mm	<ul style="list-style-type: none"> • 120lm/W • 2700 / 3000 / 4000 / 5000K or TW 2700 to 5000K • RA>80 / RA>90 (on request) • McAdam Step < 3 • UGR<16 • L80 B20 at 50.000h 	<ul style="list-style-type: none"> • High-quality aluminium housing with powder coated finish • Optics: high-quality PMMA Diamond prism + Opal (DOP) diffuser for direct light to obtain minimum glare; high-quality PMMA Opal diffuser for indirect light 	<ul style="list-style-type: none"> • Lighting control: Not dimmable / SwitchDIM / Flicker-free dimming (3-100%) DALI / DALI 2-channels (direct/indirect) / Casambi / Pull switchDIM (on request) • Stand-alone sensor Active+





KYRA PENDANT DIRECT/INDIRECT

Order code	Description	System power (W)	Direct light output (lm)	Indirect light output (lm)	Weight (kg)
KYRA PENDANT DIRECT/INDIRECT High Efficiency					
KY0I410PEX0020	KYRA PDI 1200 HE DOP	50	3381	2712	4,8
KY0I410PEX0120	KYRA PDI 1200 HE DOP DALI	51	3381	2712	4,8
KY0I410PEX0220	KYRA PDI 1200 HE DOP 2CH DALI	51	3381	2712	4,9
KY0I410PEX0320	KYRA PDI 1200 HE DOP EM1h	52	3381	2712	4,8
KY0I410PEX0620	KYRA PDI 1200 HE DOP EM1h DALI	53	2631	1927	4,8
KY0I510PEX0020	KYRA PDI 1500 HE DOP	62	4220	3457	5,9
KY0I510PEX0120	KYRA PDI 1500 HE DOP DALI	63	4220	3457	5,9
KY0I510PEX0220	KYRA PDI 1500 HE DOP 2CH DALI	63	4220	3457	5,9
KY0I510PEX0320	KYRA PDI 1500 HE DOP EM1h	64	4220	3457	5,9
KY0I510PEX0620	KYRA PDI 1500 HE DOP EM1h DALI	65	4220	3457	5,9
KY0I820PEX0020	KYRA PDI 2400 HE DOP	100	6762	5424	9,6
KY0I820PEX0120	KYRA PDI 2400 HE DOP DALI	102	6762	5424	9,6
KY0I820PEX0220	KYRA PDI 2400 HE DOP 2CH DALI	102	6762	5424	9,6
KY0I820PEX0320	KYRA PDI 2400 HE DOP EM1h	104	6762	5424	9,6
KY0I820PEX0620	KYRA PDI 2400 HE DOP EM1h DALI	105	5262	3854	9,7
KY0IA20PEX0020	KYRA PDI 3000 HE DOP	124	8440	6914	11,8
KY0IA20PEX0120	KYRA PDI 3000 HE DOP DALI	125	8440	6914	11,8
KY0IA20PEX0220	KYRA PDI 3000 HE DOP 2CH DALI	125	8440	6914	11,8
KY0IA20PEX0320	KYRA PDI 3000 HE DOP EM1h	126	8440	6914	12,6
KY0IA20PEX0620	KYRA PDI 3000 HE DOP EM1h DALI	127	8440	6914	12,6
KYRA PENDANT DIRECT/INDIRECT High Output					
KY0I410POX0020	KYRA PDI 1200 HO DOP	70	4503	3685	4,8
KY0I410POX0120	KYRA PDI 1200 HO DOP DALI	71	4503	3685	4,8
KY0I410POX0220	KYRA PDI 1200 HO DOP 2CH DALI	71	4503	3685	4,9
KY0I410POX0320	KYRA PDI 1200 HO DOP EM1h	72	4503	3685	4,8
KY0I410POX0620	KYRA PDI 1200 HO DOP EM1h DALI	73	4503	3685	4,8
KY0I510POX0020	KYRA PDI 1500 HO DOP	87	5597	4580	5,9
KY0I510POX0120	KYRA PDI 1500 HO DOP DALI	88	5597	4580	5,9
KY0I510POX0220	KYRA PDI 1500 HO DOP DALI	89	5597	4580	5,9
KY0I510POX0320	KYRA PDI 1500 HO DOP EM1h	89	5597	4580	5,9
KY0I510POX0620	KYRA PDI 1500 HO DOP EM1h DALI	90	5597	4580	5,9
KY0I820POX0020	KYRA PDI 2400 HO DOP	140	9006	7370	9,6
KY0I820POX0120	KYRA PDI 2400 HO DOP DALI	142	9006	7370	9,6
KY0I820POX0220	KYRA PDI 2400 HO DOP 2CH DALI	142	9006	7370	9,6
KY0I820POX0320	KYRA PDI 2400 HO DOP EM1h	144	9006	7370	9,6
KY0I820POX0620	KYRA PDI 2400 HO DOP EM1h DALI	145	9006	7370	9,7
KY0IA20POX0020	KYRA PDI 3000 HO DOP	174	11194	9160	11,8
KY0IA20POX0120	KYRA PDI 3000 HO DOP DALI	176	11194	9160	11,8
KY0IA20POX0220	KYRA PDI 3000 HO DOP 2CH DALI	176	11194	9160	11,8
KY0IA20POX0320	KYRA PDI 3000 HO DOP EM1h	178	11194	9160	12,6
KY0IA20POX0620	KYRA PDI 3000 HO DOP EM1h DALI	180	18012	14740	12,6
KYRA PDI TUNABLE White					
KY0I410POD0120	KYRA PDI 1200 HO TW2700-5000K DOP DALI	51	2750	2565	4,8
KY0I510POD0120	KYRA PDI 1500 HO TW2700-5000K DOP DALI	63	3529	3040	5,9
KY0I820POD0120	KYRA PDI 2400 HO TW2700-5000K DOP DALI	102	5500	5130	9,6
KY0IA20POD0120	KYRA PDI 3000 HO TW2700-5000K DOP DALI	125	7058	6080	11,8





L (mm)
1217
1517
2417
3017

LED color temperature	Code X
2700K Warm white	2
3000K Warm white	3
4000K Natural white	4
5000K Cool white	5

KYRA Housing Color	Code Z
White RAL9016 fine texture	1
Black RAL9005 fine texture	2
Grey RAL9006 fine texture	3


LED color temperature	Code X
2700K Warm white	H
3000K Warm white	G
4000K Natural white	E
5000K Cool white	C

Direct/indirect

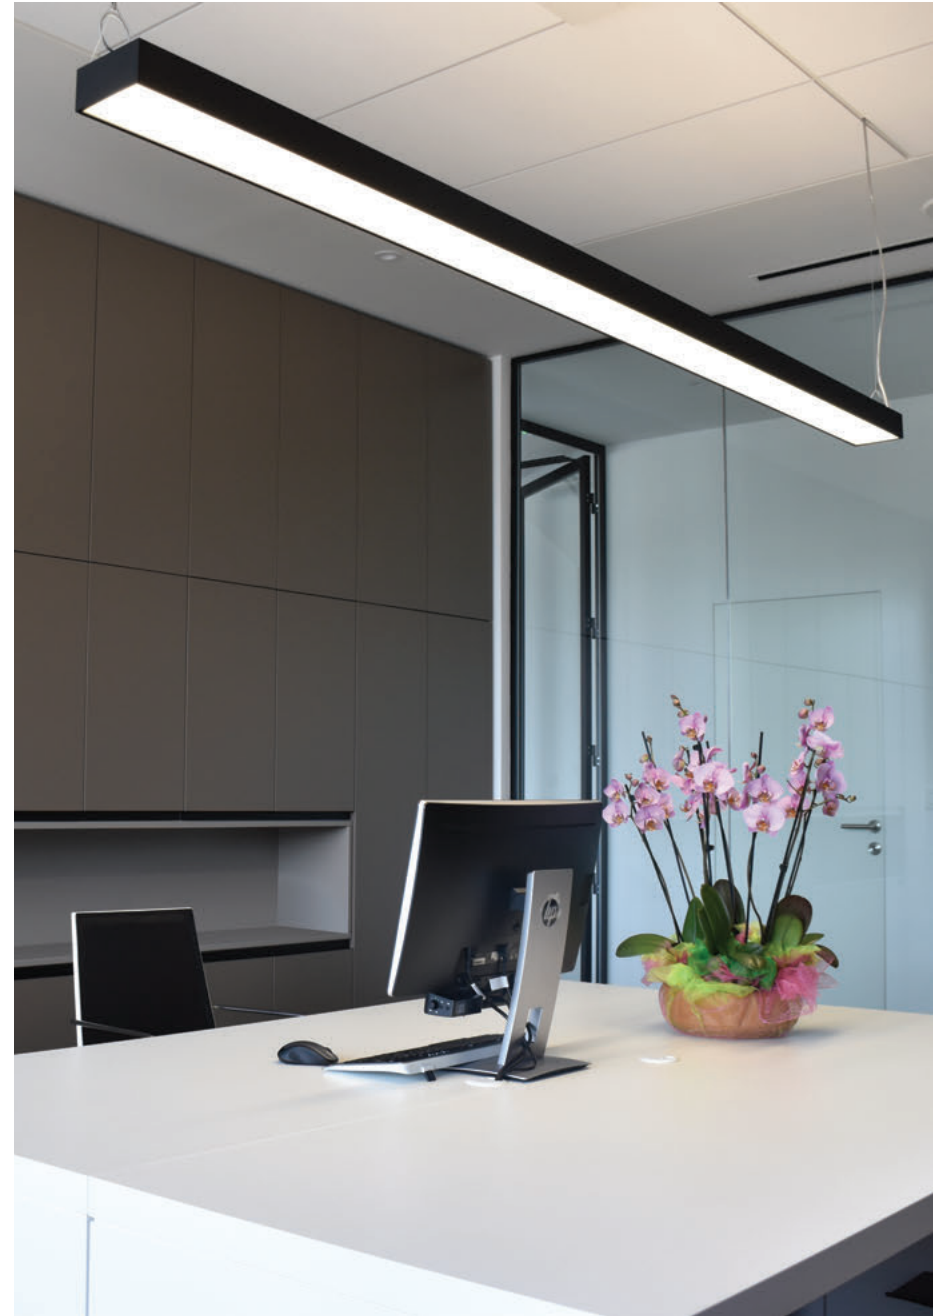

KYRA PENDANT DIRECT


Order code	Description	System power (W)	Light output (lm)	Weight (kg)
KYRA PENDANT DIRECT High efficiency				
KY0P410PEX0020	KYRA P 1200 HE DOP	26	3250	4,8
KY0P410PEX0120	KYRA P 1200 HE DOP DALI	27	3250	4,8
KY0P410PEX0320	KYRA P 1200 HE DOP EM1h	28	3250	4,8
KY0P410PEX0620	KYRA P 1200 HE DOP EM1h DALI	29	3250	4,8
KY0P510PEX0020	KYRA P 1500 HE DOP	31	3875	5,9
KY0P510PEX0120	KYRA P 1500 HE DOP DALI	32	3875	5,9
KY0P510PEX0320	KYRA P 1500 HE DOP EM1h	33	3875	5,9
KY0P510PEX0620	KYRA P 1500 HE DOP EM1h DALI	34	3875	5,9
KY0P820PEX0020	KYRA P 2400 HE DOP	52	6500	9,6
KY0P820PEX0120	KYRA P 2400 HE DOP DALI	54	6500	9,6
KY0P820PEX0320	KYRA P 2400 HE DOP EM1h	55	6500	9,6
KY0P820PEX0620	KYRA P 2400 HE DOP EM1h DALI	56	6500	9,6
KY0PA20PEX0020	KYRA P 3000 HE DOP	62	7750	11,8
KY0PA20PEX0120	KYRA P 3000 HE DOP DALI	64	7750	11,8
KY0PA20PEX0320	KYRA P 3000 HE DOP EM1h	65	7750	11,8
KY0PA20PEX0620	KYRA P 3000 HE DOP EM1h DALI	66	7750	11,8
KYRA PENDANT DIRECT High output				
KY0P410POX0020	KYRA P 1200 HO DOP	36	4140	4,8
KY0P410POX0120	KYRA P 1200 HO DOP DALI	37	4140	4,8
KY0P410POX0320	KYRA P 1200 HO DOP EM1h	38	4370	4,8
KY0P410POX0620	KYRA P 1200 HO DOP EM1h DALI	39	4140	4,8
KY0P510POX0020	KYRA P 1500 HO DOP	44	5060	5,9
KY0P510POX0120	KYRA P 1500 HO DOP DALI	45	5060	5,9
KY0P510POX0320	KYRA P 1500 HO DOP EM1h	46	5060	5,9
KY0P510POX0620	KYRA P 1500 HO DOP EM1h DALI	47	5060	5,9
KY0P820POX0020	KYRA P 2400 HO DOP	72	8280	9,6
KY0P820POX0120	KYRA P 2400 HO DOP DALI	74	8280	9,6
KY0P820POX0320	KYRA P 2400 HO DOP EM1h	75	8280	9,6
KY0P820POX0620	KYRA P 2400 HO DOP EM1h DALI	76	8280	9,6
KY0PA20POX0020	KYRA P 3000 HO DOP	88	10120	11,8
KY0PA20POX0120	KYRA P 3000 HO DOP DALI	90	10120	11,8
KY0PA20POX0320	KYRA P 3000 HO DOP EM1h	91	10120	12,6
KY0PA20POX0620	KYRA P 3000 HO DOP EM1h DALI	92	10120	12,6
KYRA PD TUNABLE White				
KY0P410POD0120	KYRA PD 1200 HO TW2700-5000K DOP DALI	27	2750	4,8
KY0P510POD0120	KYRA PD 1500 HO TW2700-5000K DOP DALI	32	3529	5,9
KY0P820POD0120	KYRA PD 2400 HO TW2700-5000K DOP DALI	54	5500	9,6
KY0PA20POD0120	KYRA PD 3000 HO TW2700-5000K DOP DALI	64	7058	11,8




L (mm)
1217
1517
2417
3017

LED color temperature	Code X
2700 K warm white	2
3000 K warm white	3
4000 K natural white	4
5000 K cool white	5

KYRA Housing Color	Code Z
White RAL9016 fine texture	1
Black RAL9005 fine texture	2
Grey RAL9006 fine texture	3

KYRA SPECTRA - SUNLIKE LEDs 	
LED color temperature	Code X
2700K Warm white	H
3000K Warm white	G
4000K Natural white	E
5000K Cool white	C




All-aluminium housing

Characterized with slim design, sharp edges and all-aluminium housing in black, grey or white variety, it is an elegant and stylish solution for your ambience.



KYRA CEILING MOUNTED



L (mm)
1217
1517
2417
3017

LED color temperature	Code X
2700 K warm white	2
3000 K warm white	3
4000 K natural white	4
5000 K cool white	5

KYRA Housing Color	Code Z
White RAL9016 fine texture	1
Black RAL9005 fine texture	2
Grey RAL9006 fine texture	3

KYRA SPECTRA - SUNLIKE LEDs 	
LED color temperature	Code X
2700K Warm white	H
3000K Warm white	G
4000K Natural white	E
5000K Cool white	C

Order code	Description	System power (W)	Light output (lm)	Weight (kg)
KYRA CEILING DIRECT High efficiency				
KY0C410PEX0020	KYRA C 1200 HE DOP	26	3250	4,8
KY0C410PEX0120	KYRA C 1200 HE DOP DALI	27	3250	4,8
KY0C410PEX0320	KYRA C 1200 HE DOP EM1h	28	3250	4,8
KY0C410PEX0620	KYRA C 1200 HE DOP EM1h DALI	29	3250	4,8
KY0C510PEX0020	KYRA C 1500 HE DOP	31	3875	5,9
KY0C510PEX0120	KYRA C 1500 HE DOP DALI	32	3875	5,9
KY0C510PEX0320	KYRA C 1500 HE DOP EM1h	33	3875	5,9
KY0C510PEX0620	KYRA C 1500 HE DOP EM1h DALI	34	3875	5,9
KY0C820PEX0020	KYRA C 2400 HE DOP	52	6500	9,6
KY0C820PEX0120	KYRA C 2400 HE DOP DALI	54	6500	9,6
KY0C820PEX0320	KYRA C 2400 HE DOP EM1h	55	6500	9,6
KY0C820PEX0620	KYRA C 2400 HE DOP EM1h DALI	56	6500	9,6
KY0CA20PEX0020	KYRA C 3000 HE DOP	62	7750	11,8
KY0CA20PEX0120	KYRA C 3000 HE DOP DALI	64	7750	11,8
KY0CA20PEX0320	KYRA C 3000 HE DOP EM1h	65	7750	11,8
KY0CA20PEX0620	KYRA C 3000 HE DOP EM1h DALI	66	7750	11,8
KYRA CEILING DIRECT High output				
KY0C410POX0020	KYRA C 1200 HO DOP	36	4140	4,8
KY0C410POX0120	KYRA C 1200 HO DOP DALI	37	4140	4,8
KY0C410POX0320	KYRA C 1200 HO DOP EM1h	38	4370	4,8
KY0C410POX0620	KYRA C 1200 HO DOP EM1h DALI	39	4140	4,8
KY0C510POX0020	KYRA C 1500 HO DOP	44	5060	5,9
KY0C510POX0120	KYRA C 1500 HO DOP DALI	45	5060	5,9
KY0C510POX0320	KYRA C 1500 HO DOP EM1h	46	5060	6,3
KY0C510POX0620	KYRA C 1500 HO DOP EM1h DALI	47	5060	6,3
KY0C820POX0020	KYRA C 2400 HO DOP	72	8280	9,6
KY0C820POX0120	KYRA C 2400 HO DOP DALI	74	8280	9,6
KY0C820POX0320	KYRA C 2400 HO DOP EM1h	75	8280	9,6
KY0C820POX0620	KYRA C 2400 HO DOP EM1h DALI	76	8280	9,6
KY0CA20POX0020	KYRA C 3000 HO DOP	88	10120	11,8
KY0CA20POX0120	KYRA C 3000 HO DOP DALI	90	10120	11,8
KY0CA20POX0320	KYRA C 3000 HO DOP EM1h	91	10120	12,6
KY0CA20POX0620	KYRA C 3000 HO DOP EM1h DALI	92	10120	12,6
KYRA C TUNABLE White				
KY0C410POD0120	KYRA C 1200 HO TW2700-5000K DOP DALI	27	2750	4,8
KY0C510POD0120	KYRA C 1500 HO TW2700-5000K DOP DALI	32	3529	5,9
KY0C820POD0120	KYRA C 2400 HO TW2700-5000K DOP DALI	54	5500	9,6
KY0CA20POD0120	KYRA C 3000 HO TW2700-5000K DOP DALI	64	7058	11,8